



Product Catalogue NEWS

Furniture Fittings

Drawer Slides	4
Hinges & Push for Open Mechanisms	10
Opening Mechanisms	18
Handles, Knobs, Profiles and Hooks	40
Kitchen Fittings	50
Wardrobe Fittings	68
Lights and Electrical Equipment	74
Connection Fittings	90

Adhesives & Cleaners **100**

Edges **108**



Drawer Slides









Full Extension

● Rieux NU80 Concealed Slide, Soft-Close

- Full extension
- Load capacity 40 kg
- Durability 60 000 cycles
- Soft-close mechanism
- Smooth and silent operation with soft closing thanks to synchronization
- 3D brackets:
 - Up / Down adjustment: 0 mm - 3 mm
 - Left / Right adjustment: ± 2 mm
 - Adjustment in depth: 0 mm - 3 mm
- For sidewall material thickness 16 mm and 19 mm

Length NL [mm]	Sidewall thickness T	
	19 mm	16 mm
300	F000162	F007588
350	F000163	F007589
400	F000164	F007590
450	F000165	F007591
500	F000166	F007592
550	F000167	F007593
600	F000168	F007594
650	F000169	F007595

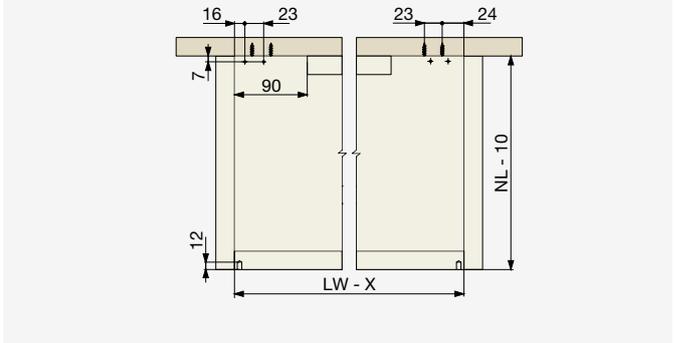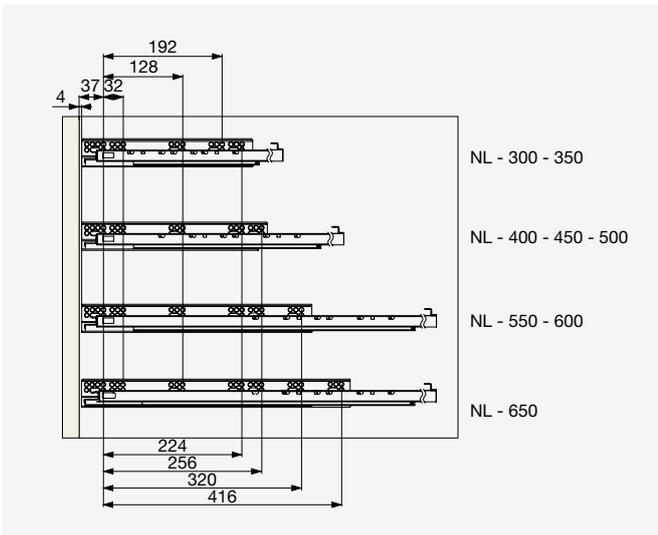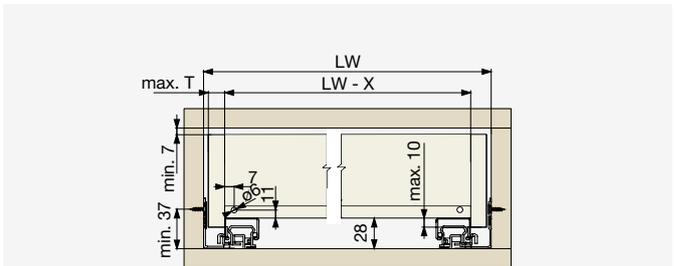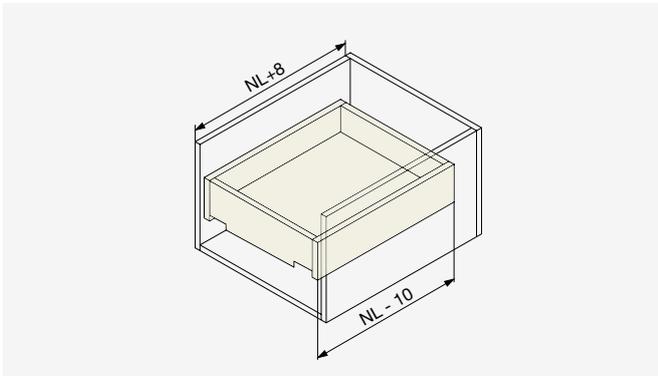

○ Legend

- NL - nominal length of slides
- NL+8 - internal cabinet depth
- NL - 10 - depth of drawer
- LW - internal cabinet width
- LW - 49 - width of bottom panel
- T = 16 --> X = 42
- T = 19 --> X = 51

Full Extension

● Riex NB58 Ball Bearing Slide, Soft-Close

- Full extension
- Loading capacity 35 kg
- Height 45.7 mm
- Material thickness 1.2×1.2×1.5 mm
- Durability 60 000 cycles





● Matt black



● Nickel


Length NL [mm]	Matt black	Nickel
300	F010339	F000808
350	F010340	F000809
400	F010341	F000810
450	F010342	F000811
500	F010343	F000812
550	F010344	F000813
600	F010345	F000814

NL [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	J [mm]
300	×	×	×	×	×	64	64	64	38	32
350	×	×	×	28	96	96	96	×	×	×
400	96	×	×	28	96	96	96	×	×	×
450	96	87	×	28	96	96	112	80	×	×
500	96	96	×	28	96	96	192	×	×	×
550	96	128	×	28	96	96	192	96	×	×
600	96	128	64	28	96	96	192	96	×	×

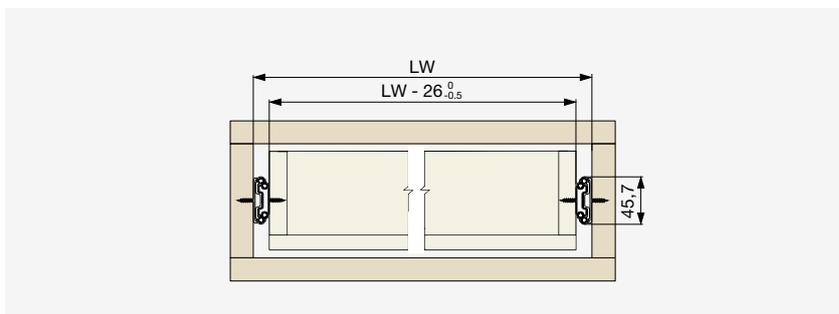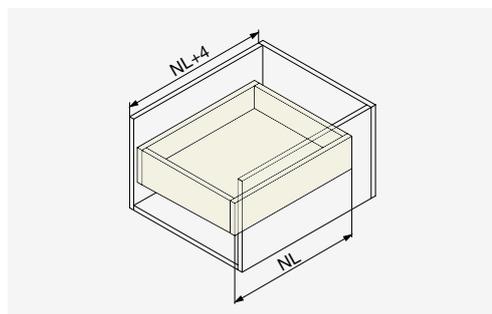

◎ Legend


- NL - nominal length of slides
- NL+4 - internal cabinet depth
- LW - internal cabinet width
- LW - 26 - width of drawer

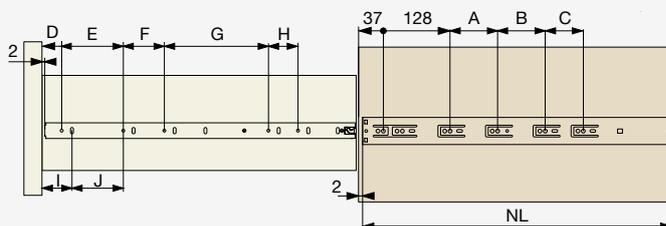

▲ CONTENT



⊕ Riex NB58 Ball Bearing Slide with Supports, Soft-Close

- Full extension
- Loading capacity 35 kg
- Height 45.7 mm
- Material thickness 1.2×1.2×1.5 mm
- Durability 60 000 cycles

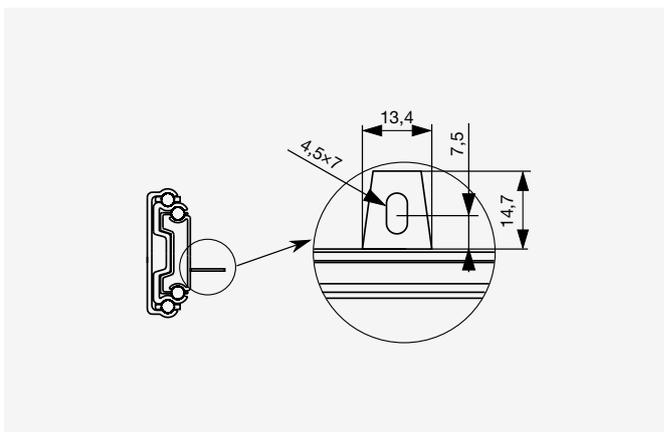


Length NL [mm]	Code
300	F007603
350	F007604
400	F007605
450	F007606
500	F007607
550	F007608
600	F007609

NL [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
300	x	x	x	x	192
350	x	x	x	x	192
400	96	x	x	192	320
450	96	87	x	192	352
500	96	96	x	192	416
550	96	128	x	192	448
600	96	128	64	192	480

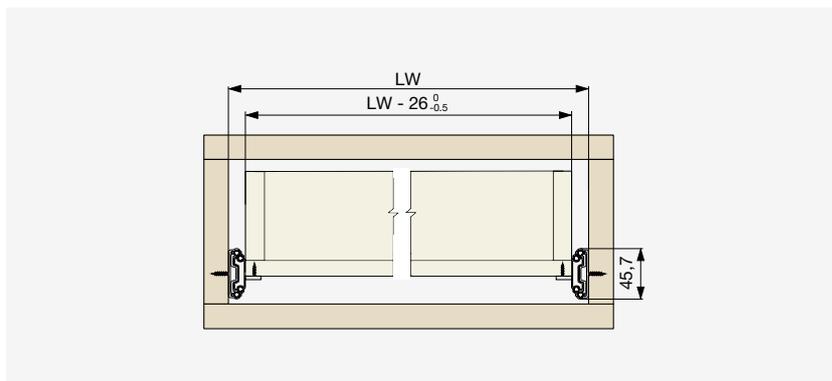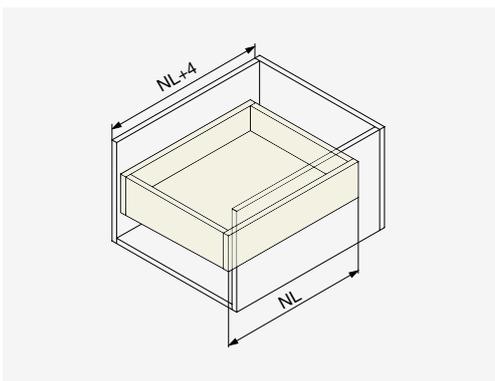

⊕ Legend

NL - nominal length of slides
 NL+4 - internal cabinet depth
 LW - internal cabinet width
 LW - 26 - width of drawer

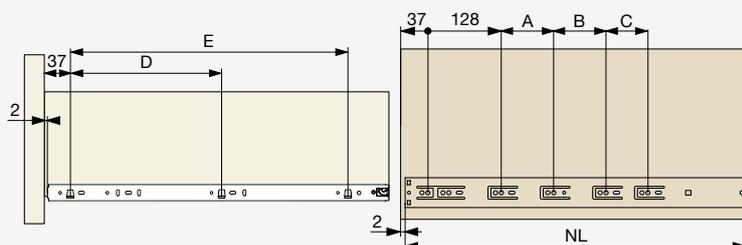




⊕ Riex NB55 Ball Bearing Slide with Supports, without Soft Close

- Full extension
- Loading capacity 45 kg
- Height 45.7 mm
- Material thickness 1.2×1.2×1.5 mm
- Durability 60 000 cycles




Length NL [mm]	Code
300	F007596
350	F007597
400	F007598
450	F007599
500	F007600
550	F007601
600	F007602

NL [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
300	96	x	x	x	192
350	96	x	x	x	192
400	96	96	x	192	320
450	96	128	x	192	356
500	96	128	64	192	416
550	96	128	96	192	448
600	96	128	128	192	488

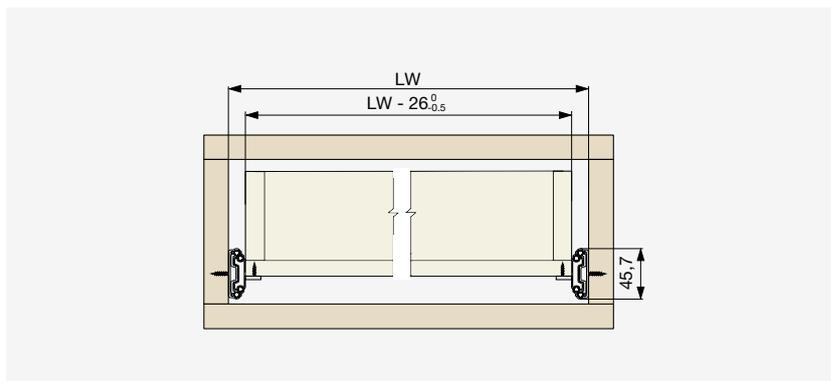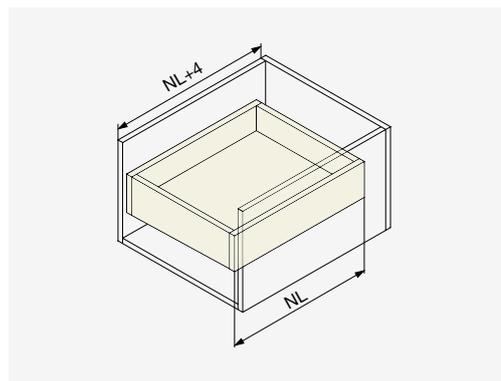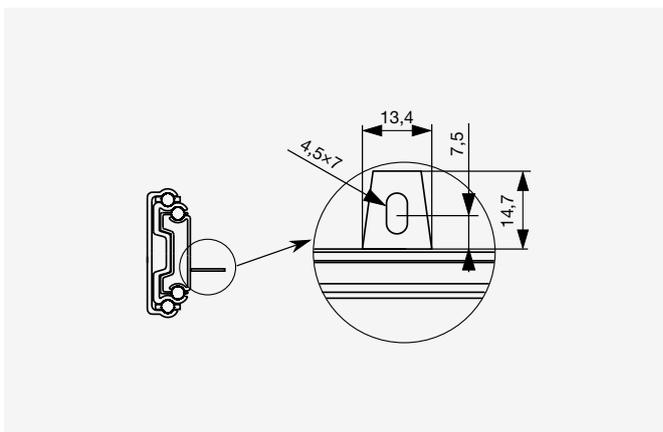

⊕ Legend

- NL - nominal length of slides
- NL+4 - internal cabinet depth
- LW - internal cabinet width
- LW - 26 - width of drawer

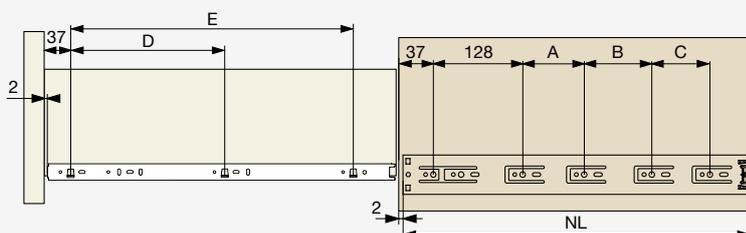




Hinges & Push for Open Mechanisms



Riex NC70 Hinges, Clip-On, Dark Grey


- Clip-On mechanism
- Flat design of CAM screw
- Long steel damper
- All accessories and screws in dark grey

⊕ Riex NC70 Hinge, Full Overlay, Dark Grey, Set of 2 Pieces

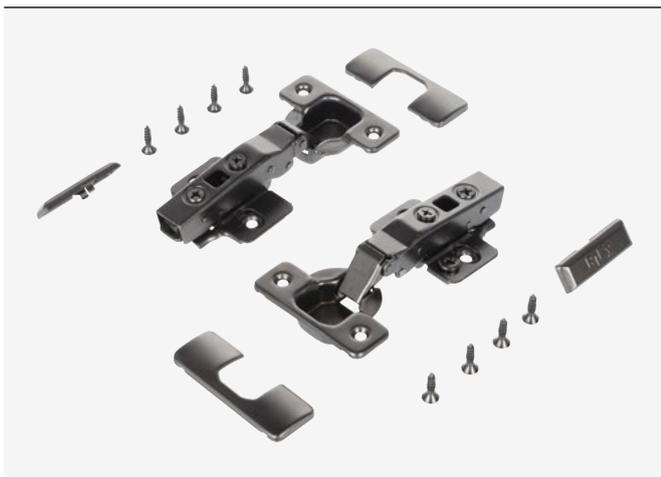

Type	Code
Soft-close	F007474

- Set contains:**
- 2 pcs of hinges
 - 2 pcs of mounting plate H0 screw-on with CAM
 - 2 pcs of cover cap for arm
 - 2 pcs of cover cap for cup
 - 8 pcs of black screws
- Packed in a bag for retail sale.

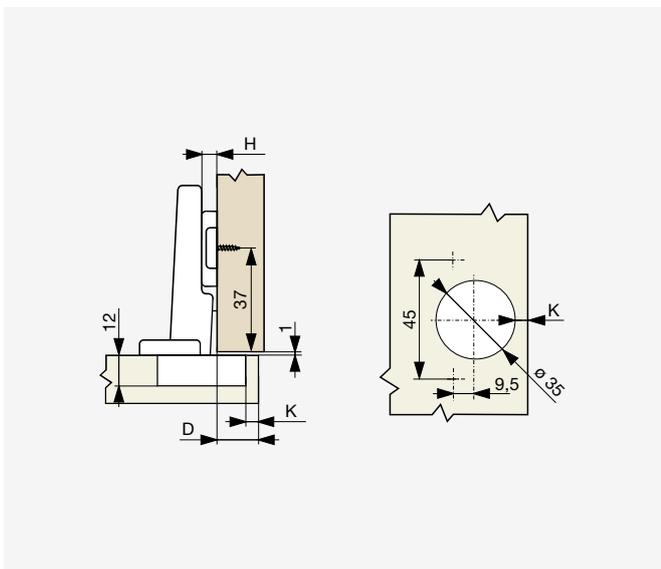

K [mm]	Plate H0	Plate H2	Plate H4
	D [mm]	D [mm]	D [mm]
4	15	13	11
5	16	14	12
6	17	15	13

Adjustment ± 3 mm

⊕ Riex NC70 Hinge, Half Overlay, Dark Grey, Set of 2 Pieces




Type	Code
Soft-close	F007475

Set contains:

- 2 pcs of hinges
- 2 pcs of mounting plate H0 screw-on with CAM
- 2 pcs of cover cap for arm
- 2 pcs of cover cap for cup
- 8 pcs of black screws

Packed in a bag for retail sale.

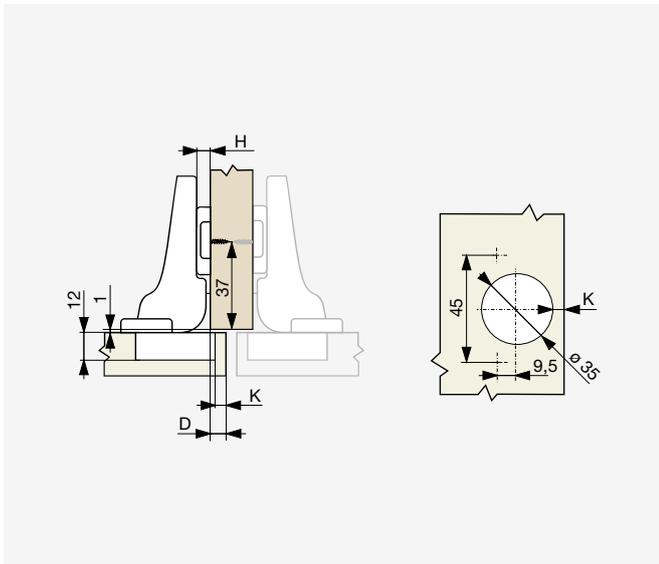


K [mm]	Plate H0	Plate H2	Plate H4
	D [mm]	D [mm]	D [mm]
4	6	4	2
5	7	5	3
6	8	6	4

Adjustment ± 3 mm


▲ CONTENT

⊕ Riex NC70 Hinge, Inset, Dark Grey, Set of 2 Pieces

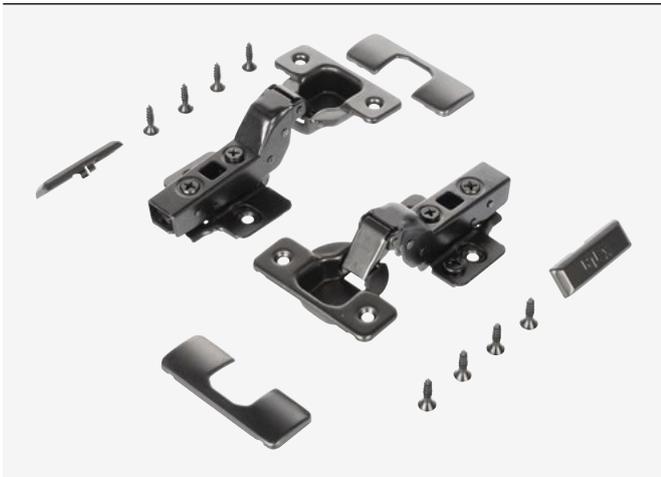

Type	Code
Soft-close	F007476

- Set contains:**
- 2 pcs of hinges
 - 2 pcs of mounting plate H0 screw-on with CAM
 - 2 pcs of cover cap for arm
 - 2 pcs of cover cap for cup
 - 8 pcs of black screws
- Packed in a bag for retail sale.

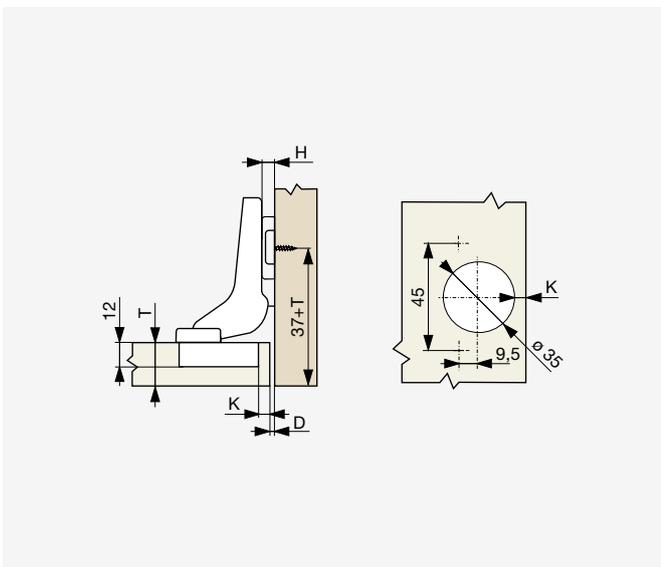

K [mm]	Plate H0	Plate H2	Plate H4
	D [mm]	D [mm]	D [mm]
3	4	6	8
4	3	5	7
5	2	4	6
6	1	3	5
7	0	2	4

Adjustment ± 3 mm

Riex Push for Open

● Riex NK50 Concealed with Buffer



● Light grey



● Dark grey



○ White

Colour	Code
Light grey	F003031
Dark grey	F003032
White	F007585

● In closed position possible adjust +1.5 mm / +10 mm

● Riex NK55 Concealed with Magnet



● Light grey




● Dark grey




○ White

Colour	Code
Light grey	F003033
Dark grey	F003034
White	F007586

● In closed position possible adjust +2 mm / +10 mm

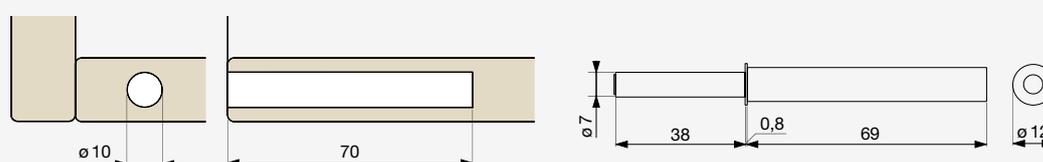

⊕ Riex NK50 / NK55 Adapter for External Installation

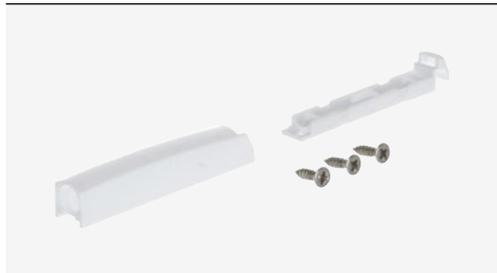


○ White



● Light grey



● Dark grey

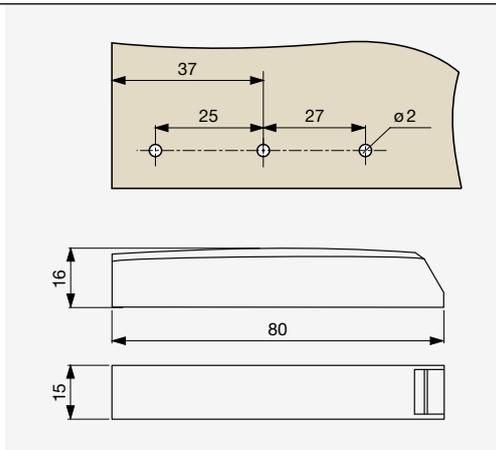


Colour	Code
Light grey	F003035
Dark grey	F003036
White	F007587





Opening Mechanisms





The FREElift Family from Kesseböhmer

- **FREElift family** encompasses various ways of opening from the Kesseböhmer brand
- **Sleek Design:** Modern and slim, the fittings blend aesthetics with advanced technology
- **Effortless Movement:** Smooth, quiet motion for wall units of various sizes and weights
- **Versatile Use:** Ideal for kitchens, bathrooms, bedrooms, and living areas
- **Space Optimization:** Slim design for maximum storage space
- **Setting:** Easy set up of various specification





FREEspace [p. 22]

- Flap fittings with innovative technology, function and design - slim, intricate and strong



FREEflap [p. 24]

- Small and strong - practical, balanced and compact



FREEfold [p. 28]

- Intelligent door system for space-saving folding as it moves upwards



FREEswing [p. 30]

- Elegant and quiet lifting for medium and large doors



FREEslide [p. 32]

- Diverse design possibilities thanks to doors lifting straight up



FREElight [p. 34]

- Versatile flap fitting combined with flap or door hinges



MAXI [p. 36]

- MAXI the strongest lift for a compact door



MAXI Up [p. 37]

- Simple solution for lid opening



DUO [p. 38]

- Classic solution for lift-up and drop down doors

● FREEspace Mini and FREEspace Forte



- Minimalistic design
- 4 colour variants
- Easy installation
- Intuitive and clear adjustment
- Clickfix assembly of the doors [tool-free]
- Opening angle limiter
- Door height min. 225 mm
- Door weight max. 15 kg
- Min. cabinet depth 80 mm

- Set consists of:**
- 2 FREEspace fittings [right and left]
 - 2 Door brackets with 2 screws each
 - 1 PTO mechanism in fitting colour [only for PTO fitting version]



reddot design award
winner 2019

Door height [mm]	Door weight* [kg]	
225	2.3 - 4.3	3.8 - 7.1
250	1.9 - 3.9	3.4 - 6.4
275	1.9 - 3.5	3.1 - 5.8
300	1.7 - 3.2	2.8 - 5.3
325	1.6 - 3.0	2.6 - 4.9
350	1.5 - 2.8	2.4 - 4.6
375	1.3 - 2.6	2.2 - 4.3
400	1.2 - 2.4	2.1 - 4.0
425	1.1 - 2.3	2.0 - 3.8
450	1.0 - 2.1	1.9 - 3.5
475	1.0 - 2.0	1.8 - 3.4
500	0.9 - 1.9	1.7 - 3.2
525	0.9 - 1.8	1.6 - 3.0
550	0.8 - 1.7	1.5 - 2.9
575	0.8 - 1.7	1.4 - 2.8
600	0.8 - 1.6	1.4 - 2.7
625	0.7 - 1.5	1.3 - 2.5
650	0.7 - 1.5	1.3 - 2.4

FOR CLASSIC HANDLE

Colour	Mini B	Mini C	Mini D	Mini E	Mini F
Nickel / grey	F008219	F008225	F008231	F008235	F008238
Nickel / white	F008220	F008226	F008232	F008236	F008239
Nickel / antracit	F008218	F008224	F008230	F008234	F008237
Black / black	F008599	F008223	F008229	F008233	F008600

FOR PUSH TO OPEN

Colour	Mini B PTO	Mini C PTO	Mini D PTO	Mini E PTO
Nickel / grey	F008208	F008211	F008214	F008216
Nickel / white	F008209	F008212	F008215	F008217
Nickel / antracit	F008590	F008210	F008213	F008594
Black / black	F008591	F008592	F008593	F008595

* Door weight includes handle weight

Door weight calculation:

$$\text{Thickness [m]} \times \text{Width [m]} \times \text{Length [m]} \times \text{Material density} = \text{Door weight [kg]}$$

Material density [kg/m³]	
Chipboard	MDF
680	760



○ Nickel / white



● Nickel / grey



● Nickel / antracit



● Black / black



Guide the door into the connecting piece ...



... and push it into the catch mechanism.



Lever position for 90° opening



Lever position for 107° opening



Adjusting the angle of the door



Adjusting the horizontal door position




Adjusting the vertical door position



Setting the spring force


● FREEspace Front Panel Screws for ALU frame

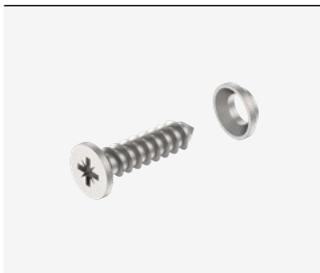


- Door screws for wide aluminum frames [≥ 45 mm]
- 4 self-tapping screws and 4 special washers

Code

F008207

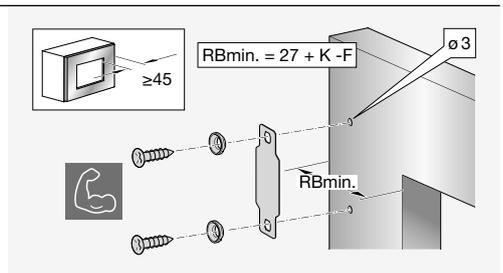

● FREEspace Drilling Template

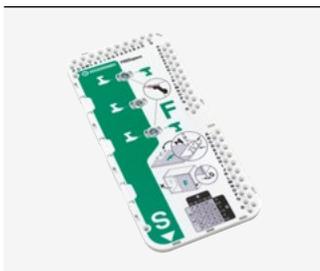

- Suitable for mini and forte
- 2-in-1 drilling [for side and flap doors]

Code

F008191

● FREEflap Mini and FREEflap Forte




- Minimalistic design
- 2 colour variants
- Easy installation
- Intuitive and clear adjustment
- Door height min. 200 mm
- Door weight max. 27 kg
- Min. cabinet depth 140 mm [for version mini 120 mm]
- Opening angle 107°
- Multi-position-stop function

- Set consists of:
- 2 FREEflap fittings [right and left]
 - 2 covers for the fittings [right and left]
 - 2 Door connecting plates
 - Drilling template [paper]



For Push To Open function we recommend to use mechanism Riex NK55 / NK50 - page 15

Compatible with the eTouch mechanism - page 27


● FREEflap Mini

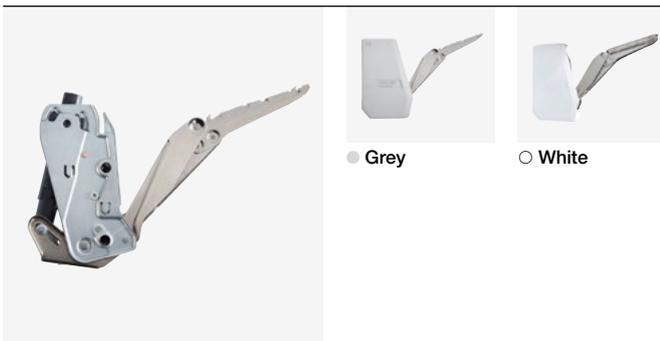

● FREEflap Forte

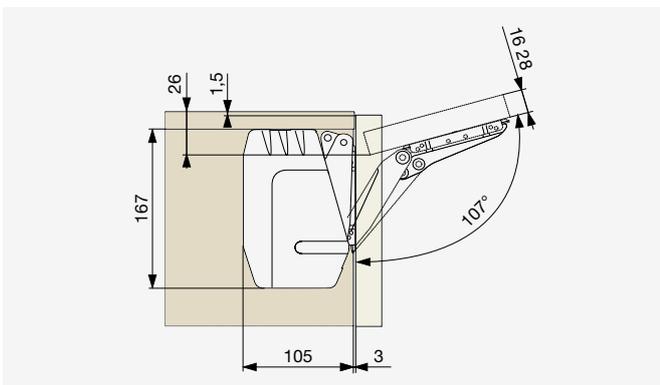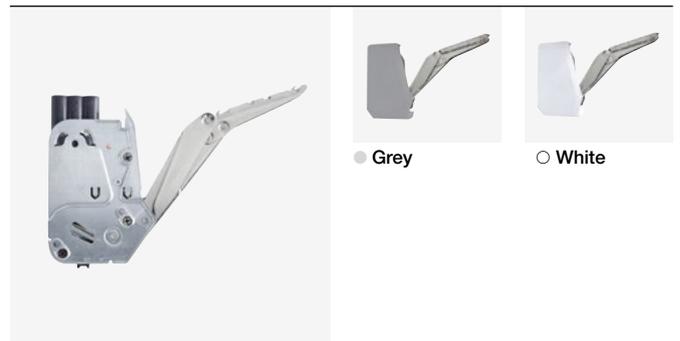

FREEflap Mini

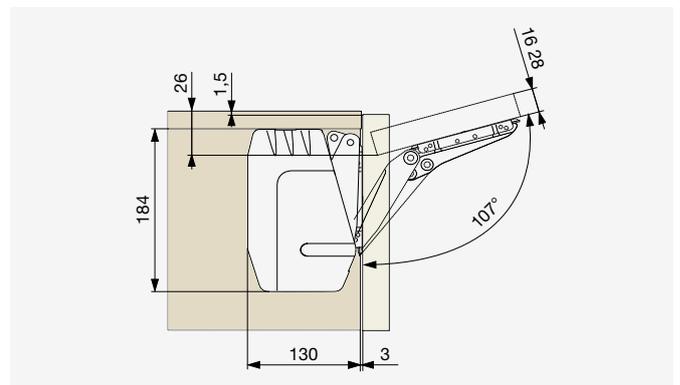

FREEflap Forte

Door weight calculation:

$$\text{Thickness [m]} \times \text{Width [m]} \times \text{Length [m]} \times \text{Material density} = \text{Door weight [kg]}$$

Material density [kg/m ³]	
Chipboard	MDF
680	760

Door height [mm]	Door weight* [kg]	Door weight for PTO [kg]	Colour		Door height [mm]	Door weight* [kg]	Door weight for PTO [kg]	Colour	
			Grey	White				Grey	White
200	1.7 - 4.6	×	F008097	F008098	425 - 450	0.6 - 1.7	×	F008097	F008098
	3.7 - 7.9	×	F008099	F008100		1.4 - 3.2	×	F008099	F008100
	6.8 - 14.7	×	F008101	F008102		2.7 - 6.1	×	F008101	F008102
200 - 225	1.5 - 4.1	×	F008097	F008098	450 - 475	4.1 - 8.4	4.7 - 9.6	F008087	F008088
	3.1 - 7.1	×	F008099	F008100		5.2 - 10.9	5.9 - 12.4	F008089	F008090
	6.0 - 13.1	×	F008101	F008102		7.8 - 16.3	8.9 - 18.6	F008091	F008092
225 - 250	1.3 - 3.8	×	F008097	F008098	475 - 500	10.4 - 20.5	11.8 - 23.3	F008093	F008094
	2.9 - 6.4	×	F008099	F008100		3.9 - 8.0	4.1 - 8.4	F008087	F008088
	5.4 - 11.8	×	F008101	F008102		4.9 - 10.3	5.2 - 10.9	F008089	F008090
250 - 275	1.2 - 3.3	1.3 - 3.8	F008097	F008098	500 - 525	7.4 - 15.4	7.8 - 16.3	F008091	F008092
	2.5 - 5.7	2.9 - 6.4	F008099	F008100		9.8 - 19.3	10.4 - 20.5	F008093	F008094
	4.8 - 10.6	5.4 - 11.8	F008101	F008102		3.7 - 7.5	4.1 - 8.4	F008087	F008088
275 - 300	1.1 - 3.1	1.2 - 3.3	F008097	F008098	525 - 550	4.7 - 9.7	5.2 - 10.9	F008089	F008090
	2.4 - 5.1	2.5 - 5.7	F008099	F008100		7.0 - 14.6	7.8 - 16.3	F008091	F008092
	4.4 - 9.6	4.8 - 10.6	F008101	F008102		9.2 - 18.3	10.4 - 20.5	F008093	F008094
300 - 325	1.0 - 2.8	1.1 - 3.1	F008097	F008098	550 - 575	3.5 - 7.1	3.7 - 7.5	F008087	F008088
	2.1 - 4.6	2.4 - 5.1	F008099	F008100		4.4 - 9.2	4.7 - 9.7	F008089	F008090
	4.0 - 8.8	4.4 - 9.6	F008101	F008102		6.6 - 13.9	7.0 - 14.6	F008091	F008092
325 - 350	0.9 - 2.6	1.0 - 2.8	F008097	F008098	575 - 600	8.8 - 17.3	9.2 - 18.3	F008093	F008094
	2.0 - 4.2	2.1 - 4.6	F008099	F008100		3.3 - 6.8	3.7 - 7.5	F008087	F008088
	3.7 - 8.1	4.0 - 8.8	F008101	F008102		4.2 - 8.8	4.7 - 9.7	F008089	F008090
350 - 375	5.2 - 11.0	×	F008087	F008088	600 - 625	6.3 - 13.2	7.0 - 14.6	F008091	F008092
	6.7 - 14.3	×	F008089	F008090		8.3 - 16.5	9.2 - 18.3	F008093	F008094
	10.1 - 21.4	×	F008091	F008092		3.2 - 6.5	3.3 - 6.8	F008087	F008088
375 - 400	13.5 - 27.3	×	F008093	F008094	625 - 650	4.0 - 8.4	4.2 - 8.8	F008089	F008090
	0.9 - 2.3	0.9 - 2.6	F008097	F008098		6.0 - 12.5	6.3 - 13.2	F008091	F008092
	1.9 - 3.8	2.0 - 4.2	F008099	F008100		8.0 - 15.6	8.3 - 16.5	F008093	F008094
400 - 425	3.5 - 7.5	3.7 - 8.1	F008101	F008102	Kesseböhmer models	3.0 - 6.2	3.3 - 6.8	F008087	F008088
	4.9 - 10.2	×	F008087	F008088		3.8 - 8.0	4.2 - 8.8	F008089	F008090
	6.3 - 13.1	×	F008089	F008090		5.7 - 12.0	6.3 - 13.2	F008091	F008092
425 - 450	9.4 - 19.8	×	F008091	F008092	F008101	7.6 - 15.0	8.3 - 16.5	F008093	F008094
	12.5 - 25.2	×	F008093	F008094		2.8 - 5.9	3.0 - 6.2	F008087	F008088
	0.8 - 2.1	0.9 - 2.3	F008097	F008098		3.6 - 7.6	3.8 - 8.0	F008089	F008090
450 - 475	1.7 - 3.6	1.9 - 3.8	F008099	F008100	F008087	5.4 - 11.5	5.7 - 12.0	F008091	F008092
	3.2 - 7.0	3.5 - 7.5	F008101	F008102		7.2 - 14.4	7.6 - 15.0	F008093	F008094
	4.7 - 9.6	×	F008087	F008088		2.6 - 5.6	3.0 - 6.2	F008087	F008088
475 - 500	5.9 - 12.4	×	F008089	F008090	F008089	3.4 - 7.3	3.8 - 8.0	F008089	F008090
	8.9 - 18.6	×	F008091	F008092		5.3 - 11.0	5.7 - 12.0	F008091	F008092
	11.8 - 23.3	×	F008093	F008094		6.9 - 14.0	7.6 - 15.0	F008093	F008094
500 - 525	0.7 - 1.9	0.8 - 2.1	F008097	F008098	F008093	0.7 - 1.9	0.8 - 2.1	F008097	F008098
	1.5 - 3.4	1.7 - 3.6	F008099	F008100		1.5 - 3.4	1.7 - 3.6	F008099	F008100
	2.9 - 6.5	3.2 - 7.0	F008101	F008102		2.9 - 6.5	3.2 - 7.0	F008101	F008102
525 - 550	4.4 - 9.0	4.7 - 9.6	F008087	F008088	4.4 - 9.0	4.7 - 9.6	F008087	F008088	
	5.6 - 11.6	5.9 - 12.4	F008089	F008090	5.6 - 11.6	5.9 - 12.4	F008089	F008090	
	8.3 - 17.4	8.9 - 18.6	F008091	F008092	8.3 - 17.4	8.9 - 18.6	F008091	F008092	
550 - 575	11.0 - 21.8	11.8 - 23.3	F008093	F008094	11.0 - 21.8	11.8 - 23.3	F008093	F008094	

* Door weight includes handle weight

▲ CONTENT

● **FREEflap eTouch - Spare Cover Right + Left**



Colour

Code

Grey

F008083

White

F008084

● **FREEflap Drilling Template**



Code

F008082

● **FREEflap Mini Opening Angle Limiter 90°, Grey**



Code

F008103

● **FREEflap Adapter for 20 mm Aluminium Frame**



Code

F008105

eTouch Accessories

● eTouch Drive Unit Set for FREEfold, FREEswing, FREEslide



Set eTouch Drive Unit FREEfold / FREEswing / FREEslide:

- Grey
- 1x drive unit with screws
- 1x power supply
- 2x radio sensor
- 1x drilling template KS for sensors
- 1x strain relief clip
- 1x ferrite

Code

F008144

● eTouch Drive Unit Set for FREEflap



Set eTouch Drive Unit FREEflap:

- Grey
- 1x drive unit with screws
- 1x power supply
- 2x radio sensors
- 1x drilling template KS for sensors
- 1x strain relief clip
- 1x ferrite

Code

F008104

● eTouch Power Cable



Type

Code

Europlug type C

F008080

UK type G

F008081

● FREEfold





- Best movement properties in its class
- Minimalistic design
- Easy installation
- Intuitive and clear adjustment
- Multi-position-stop function
- Central safety hinges prevent fingers from becoming trapped

- Set consists of:**
- 2 FREEfold fittings [right and left]
 - 2 Door brackets
 - Drilling template [paper]

Fitting FREEfold must be combined with cup hinges e.g. NC40 or others.

Compatible with the eTouch mechanism - page 27

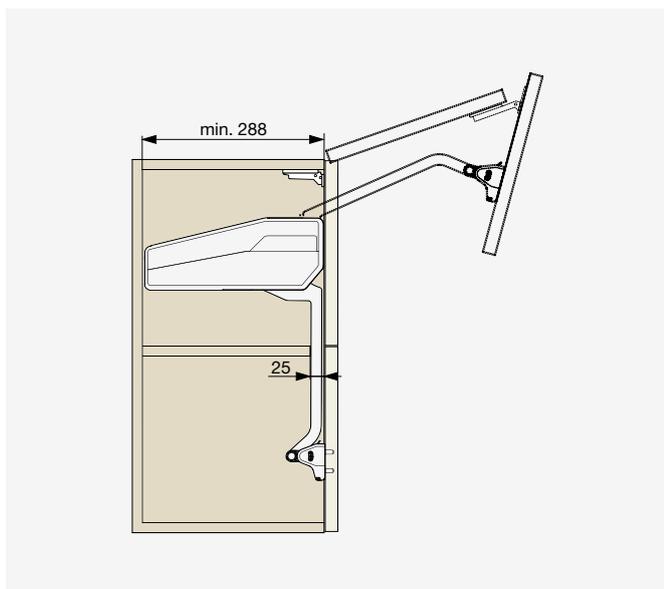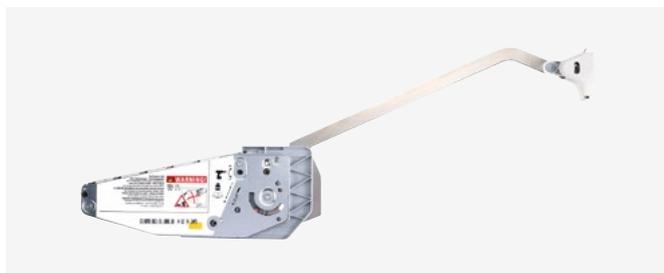

Cabinet height [mm]	Door weight* [kg]	Code
580 - 650	4.3 - 8.8	F008122
	3.9 - 7.9	F008126
650 - 730	5.8 - 11.6	F008127
	9.5 - 18.7	F008128
710 - 790	3.5 - 7.2	F008129
	5.2 - 10.3	F008130
770 - 840	8.7 - 17.2	F008131
	4.9 - 9.8	F008133

* Door weight includes handle weight

Door weight calculation:

Thickness [m] × Width [m] × Length [m] × Material density = Door weight [kg]

Material density [kg/m ³]	
Chipboard	MDF
680	760

● **FREEfold Set Of Covers Right + Left**



Colour	Type	Code
Grey	Standard	F008108
	eTouch	F008110
White	Standard	F008109
	eTouch	F008111
Anthracite	Standard	F008603

● **FREEfold Drilling Template**



Code
F008106

● **FREEfold Adapters for Aluminium Frame [2 pcs]**



Code
F008143

● **FREEfold Central Hinge**




Code
F008357

● **FREEfold Opening Angle Limiter, Grey**



Code
F008107

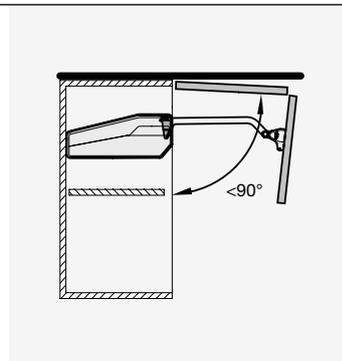


▲ CONTENT

● FREEswing



- Ideal for medium and large doors
- Unlimited access to stored items
- Intuitive and clear adjustment
- Multi-position-stop function
- Easy installation
- Patented soft opening and closing
- Compatible with eTouch system

- Set consists of:**
- 2 FREEswing fittings [right and left]
 - 2 Door brackets
 - 2 sleeves for Connecting Rod
 - Drilling template [paper]

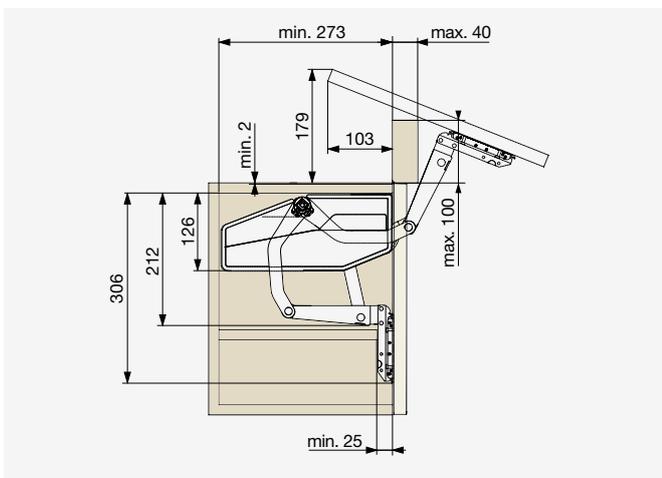

For classic handle			
Door height [mm]	Door weight* [kg]	Code	Model
370	3.4 - 6.5	F008248	S4sw
400	3.3 - 6.3		
450	3.2 - 6.1		
500	3.0 - 5.8		
670	5.7 - 11.3	F008250	S6sw
700	5.6 - 11.1		
750	5.4 - 10.7		
800	5.3 - 10.3		

* Door weight includes handle weight

Door weight calculation:

Thickness [m] × Width [m] × Length [m] × Material density = Door weight [kg]

Material density [kg/m ³]	
Chipboard	MDF
680	760

● eTouch Replacement Lever Arm Left



Code

F008244

● FREEswing Set of Covers Right + Left



Colour	Type	Code
Grey	Standard	F008242
	eTouch	F008240
White	Standard	F008243
	eTouch	F008241
Anthracite	Standard	F008604

● FREEswing Connecting Rod



Type	Cabinet width* [mm]	Rod length [mm]	Code
Standard	450	324	F008180
	600	474	F008182
	900	774	F008184
	1600	1474	F008178
eTouch	600	449	F008188

* Wall thickness 16 - 19 mm

● FREEswing Adapters for Aluminium Frame



Code

F008105


▲ CONTENT

● FREEslide



- Easy installation
- Intuitive and clear adjustment
- Multi-position-stop function
- Soft opening and closing
- Ideal for tall cabinets
- Easy access to cabinet
- Compatible with eTouch system

- Set consists of:**
- 2 FREEslide fittings [right and left]
 - 2 Door brackets
 - 2 Sleeves for Connecting Rod
 - Drilling template [paper]

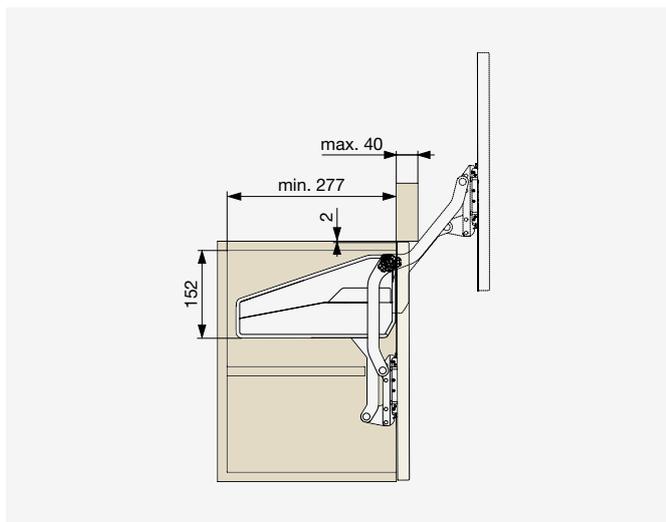

Cabinet height [mm]	Door weight* [kg]	Code
430 - 600	1.6 - 3.3	F008172
	2.6 - 5.5	F008173
	5.0 - 9.7	F008174
	7.4 - 14.6	F008175

* Door weight includes handle weight



Door weight calculation:

$\text{Thickness [m]} \times \text{Width [m]} \times \text{Length [m]} \times \text{Material density} = \text{Door weight [kg]}$

Material density [kg/m ³]	
Chipboard	MDF
680	760

● **FREEslide Set of Covers
Right + Left**




Colour	Type	Code
Grey	Standard	F008153
	eTouch	F008155
White	Standard	F008154
	eTouch	F008156

● **FREEslide Adapters
for Aluminium Frame**



Code
F008105

● **FREEslide Connecting
Rod**

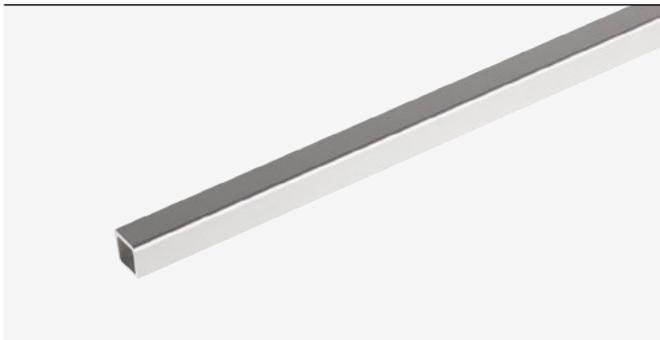

Type	Cabinet width* [mm]	Rod length [mm]	Code
Standard	450	324	F008180
	600	474	F008182
	900	774	F008184
	1600	1474	F008178
eTouch	600	449	F008188

* Wall thickness 16 - 19 mm

● **eTouch Replacement Lever Arm
LEFT**



Cabinet height [mm]	Code
430 - 600	F008160

● FREElight



- Minimalistic design
- Easy installation
- Clickfix assembly of the door [tool-free]
- Fitting can be installed left or right
- Multi-position-stop function

Set consists of:

- 1x fitting
- 1x cover cap left
- 1x cover cap right
- 1x door bracket [for wood and euro screws]
- 1x cabinet bracket [for wood and euro screws]
- 1x adjustment key

Fitting FREElight must be combined with cup hinges e.g. NC70, NC40 or others.

For Push To Open function we recommend to use mechanism Riex NK55 / NK50 - page 15

For classic handle

Door height [mm]	Opening angle			Colour
	75°	90°	110°	
		Door weight* [kg]		White
275	×	2,8 - 3,8	1,9 - 2,8	F008146
	×	3,5 - 6,0	2,6 - 4,3	F008148
	×	5,8 - 10,5	4,2 - 7,1	F008152
300	2,7 - 4,6	2,2 - 3,4	1,1 - 2,4	F008146
	4,1 - 8,1	3,3 - 5,7	2,4 - 4,1	F008148
	6,7 - 12,5	5,2 - 9,0	4,0 - 7,0	F008152
350	2,6 - 4,2	2,1 - 2,9	1,1 - 2,1	F008146
	3,8 - 6,5	2,7 - 4,9	2,1 - 3,7	F008148
	6,2 - 10,9	4,8 - 8,0	3,6 - 6,4	F008152
400	2,3 - 3,3	1,6 - 2,3	1,1 - 1,7	F008146
	3,0 - 5,8	2,3 - 4,6	1,7 - 3,2	F008148
	5,6 - 10,2	4,3 - 7,9	3,2 - 5,5	F008152
450	2,2 - 3,1	1,3 - 2,2	1,0 - 1,6	F008146
	2,7 - 4,6	2,0 - 3,8	1,6 - 2,8	F008148
	5,5 - 9,7	3,8 - 6,3	2,8 - 5,5	F008152
500	1,7 - 2,8	1,2 - 2,0	1,0 - 1,4	F008146
	2,3 - 4,6	1,7 - 3,4	1,3 - 2,5	F008148
	4,6 - 8,5	3,4 - 6,0	2,5 - 4,5	F008152
550	1,6 - 2,6	1,2 - 1,9	0,8 - 1,3	F008146
	2,2 - 4,2	1,7 - 3,0	1,3 - 2,2	F008148
	4,1 - 6,6	3,0 - 5,1	2,2 - 3,9	F008152
600	1,2 - 2,3	0,9 - 1,6	0,7 - 1,2	F008146
	2,1 - 3,9	1,6 - 3,0	1,2 - 2,2	F008148
	3,9 - 6,0	3,0 - 4,7	2,2 - 4,3	F008152

For Push To Open

Door height [mm]	Opening angle			Colour
	75°	90°	110°	
		Door weight* [kg]		White
300	×	×	1,5 - 2,1	F008148
	×	×	2,1 - 3,0	F008150
	×	×	2,7 - 4,1	F008152
350	2,6 - 3,6	1,7 - 2,5	1,5 - 2,1	F008148
	3,1 - 5,3**	2,1 - 3,2	1,9 - 2,7	F008150
	4,7 - 6,6**	3,0 - 4,0	2,6 - 3,7	F008152
400	2,3 - 3,1	1,3 - 1,9	1,1 - 1,5	F008148
	3,1 - 5,1	1,9 - 3,0	1,5 - 2,5	F008150
	4,3 - 6,6	2,8 - 4,0	2,2 - 3,5	F008152
450	1,8 - 2,6	1,1 - 1,5	1,0 - 1,3	F008148
	2,6 - 4,0**	1,5 - 2,6	1,3 - 2,3	F008150
	3,6 - 5,6**	2,2 - 3,2	2,0 - 2,9	F008152
500	1,6 - 2,3	×	×	F008148
	2,3 - 3,6	1,4 - 2,4	1,2 - 1,7	F008150
	3,3 - 4,9	2,0 - 2,9	1,6 - 2,7	F008152
550	1,5 - 2,1	×	×	F008148
	2,1 - 3,6	1,3 - 2,2	1,2 - 1,7	F008150
	3,1 - 4,6	1,8 - 2,8	1,5 - 2,3	F008152
600	1,4 - 2,0	×	×	F008148
	2,0 - 3,2	1,3 - 1,7	1,2 - 1,5	F008150
	2,7 - 4,2	1,5 - 2,5	1,3 - 2,1	F008152

* Door weight includes handle weight
 ** Required PTO mechanism with magnet

Door weight calculation:

Thickness [m] × Width [m] × Length [m] × Material density = Door weight [kg]

Material density [kg/m³]

Chipboard	MDF
680	760




Door bracket either with euro screws or wood screws



Cabinet bracket either with euro screws or wood screws



Set lift force in steps using an adjustment key.

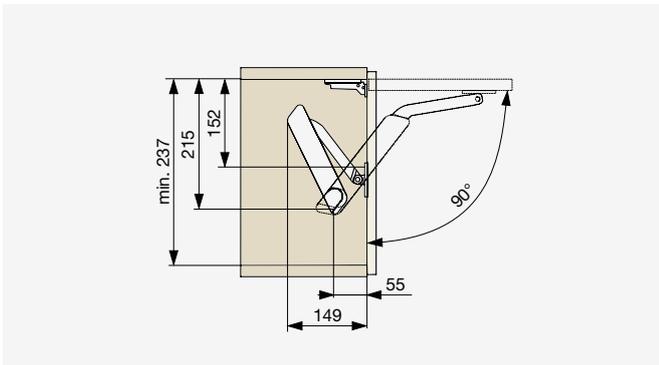

● **FREElight - Adapters for Aluminium Frame [2 pcs]**



Code

F008143

Fitting FREElight for Push To Open must be combined with PTO mechanism e.g. Riex NK55 or others.

● MAXI



- Minimalistic design
- Lifts up to 27.3 kg door weight
- Clickfixx for easy door installation
- Multi-position-stop function
- Easy installation

Fitting MAXI lift must be combined with cup hinges e.g. NC70, NC40 or others.

For Push To Open function we recommend to use push for open Riex NK55 / NK50.

For cabinets wider than 600 mm always use 2 sets of fittings. In this case, the load capacity of the fitting is added together.

Door height [mm]	Opening angle			Code	Model
	75°	90°	110°		
Door weight per 1 fitting* [kg]					
300	11.9 - 21.0	9.1 - 15.8	6.8 - 11.6	F008256	C
	15.4 - 27.3	11.9 - 20.8	9.2 - 15.0	F008257	D
400	8.9 - 15.8	6.9 - 11.9	5.1 - 8.7	F008256	C
	11.6 - 20.5	8.9 - 15.6	6.9 - 11.2	F008257	D
500	7.2 - 12.5	5.5 - 9.6	4.0 - 7.1	F008256	C
	9.4 - 16.2	7.2 - 12.5	5.7 - 9.0	F008257	D
600	5.9 - 10.6	4.6 - 7.9	3.3 - 5.9	F008256	C
	7.6 - 13.7	6.0 - 10.4	4.5 - 7.6	F008257	D
700	5.0 - 8.8	3.8 - 6.6	2.9 - 4.8	F008256	C
	6.5 - 11.4	4.9 - 8.7	3.8 - 6.2	F008257	D
800	4.4 - 7.9	3.4 - 5.9	2.6 - 4.3	F008256	C
	5.7 - 10.4	4.4 - 7.8	3.4 - 5.6	F008257	D
900	4.0 - 7.0	3.0 - 5.2	2.3 - 3.8	F008256	C
	5.2 - 9.1	3.9 - 6.9	3.0 - 5.0	F008257	D
1000	3.6 - 6.3	2.7 - 4.7	2.0 - 3.5	F008256	C
	4.6 - 8.2	3.6 - 6.2	2.7 - 4.5	F008257	D

* Door weight includes handle weight

Door weight calculation:


Thickness [m] × Width [m] × Length [m] × Material density = Door weight [kg]

Material density [kg/m³]	
Chipboard	MDF
680	760



○ White Model C

● Black Model D

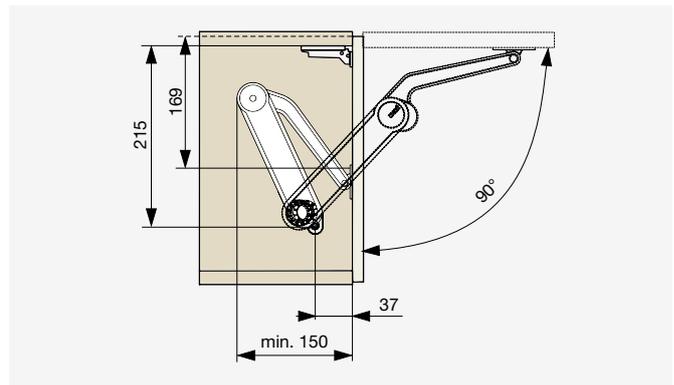


● MAXI Up



Lid depth D [mm]	Lid weight 1 MAXI Up [kg]	Code	Opening angle
400	5.2 - 9.4	1× F008259	75°
500	4.3 - 7.5		
600	4.0 - 6.7		
400	10.4 - 18.8	2× F008259	
500	8.6 - 15.0		
600	8.0 - 13.4		

For cabinet wider than 600 mm, always use 2 MAXI Up fittings. Fitting MAXI Up lift must be combined with hinges, for example F000001.

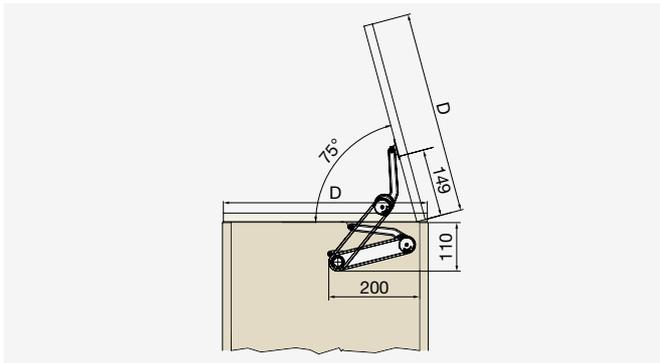

● Mounting Bracket for Cabinet



Code
F010347

● Mounting Bracket for Door



Code
F010348

● DUO



- 3 opening angles - 75°, 90°, 110°
- Door height max. 500 mm
- Door weight max. 6 kg
- Min. cabinet depth 135 mm
- Installation on the right or left wall
- Applications for lift-up flaps and dropdown doors
- Multi-position-stop function
- After 200 cycles it is recommended to tighten the door


Set consists of:

- 1 fitting
- 1 cabinet bracket
- 1 door bracket


Fitting DUO must be combined with cup hinges e.g. NC70, NC40 or others.

For Push To Open function we recommend to use mechanism Riex NK55 / NK50 - page 15



Opening angle	Code
75°, 90°, 110°	F008075

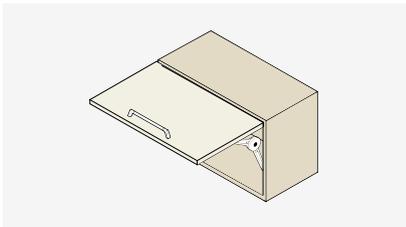

Lift-up application

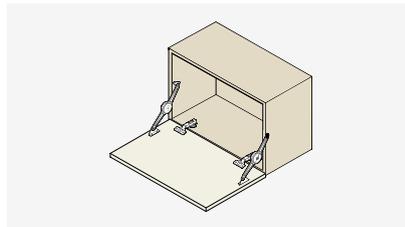

Dropdown application

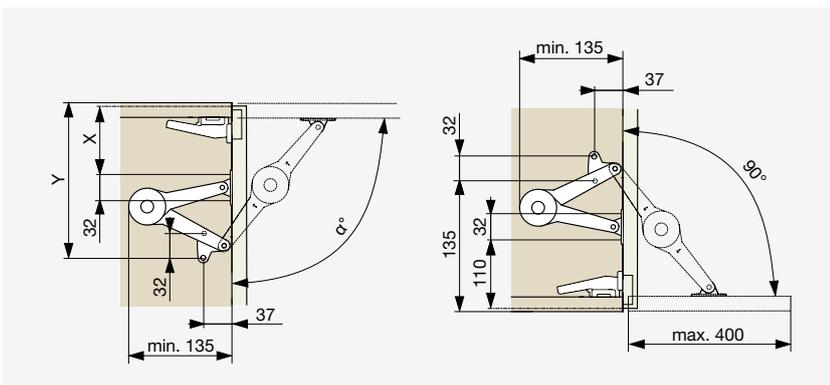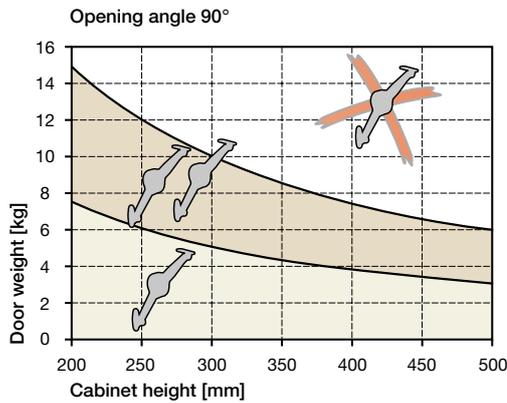

Mounting dimensions

Opening angle α	X [mm]	Y [mm]
75°	132	160
90°	90	160
110°	92	128






Handles, Knobs, Profiles and Hooks




▲ CONTENT

⊕ RieXTouch XH63 Handle

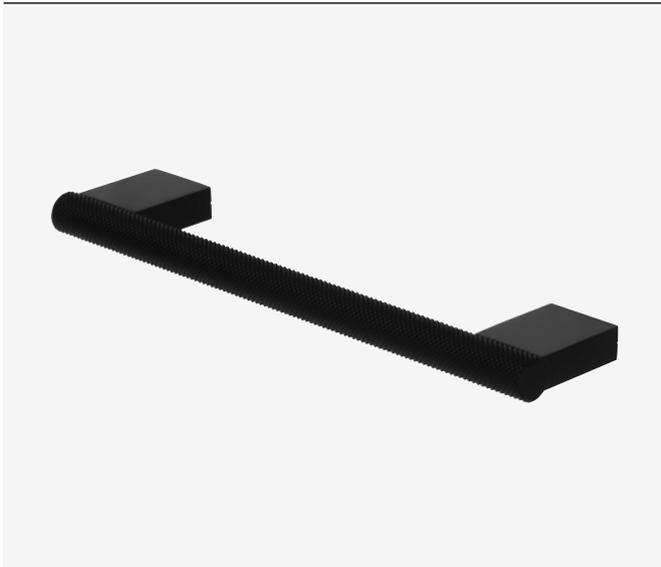

● Matt gold

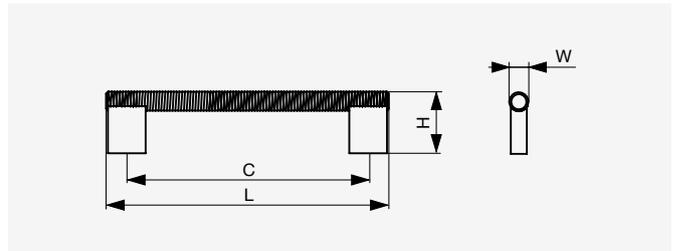

● Matt black

Dimension C [mm]	Matt black	Matt gold	Dimension L [mm]	Dimension H [mm]	Dimension W [mm]
96	F008313	F008319	118	32,5	10
128	F008314	F008320	150		
160	F008315	F008321	182		
224	F008316	F008322	246		
320	F008317	F008323	342		


⊕ RieXTouch XH08 Handle



● Matt chrome ● Matt nickel ● Polished gold ● Polished chrome




● Stainless steel imitation

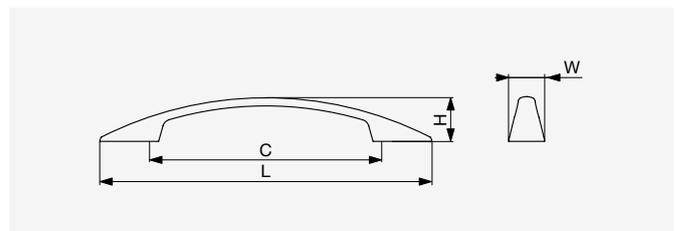

● Brushed nickel

Dimension C [mm]	Brushed nickel	Matt chrome	Matt nickel	Polished gold	Polished chrome	Stainless steel imitation	Dimension L [mm]	Dimension H [mm]	Dimension W [mm]
96	F002232	F002226	F002228	F002230	F002224	F007685	154	23	21
128	F002233	F002227	F002229	F002231	F002225	F007686	186		


⊕ RiexTouch XH03 Handle

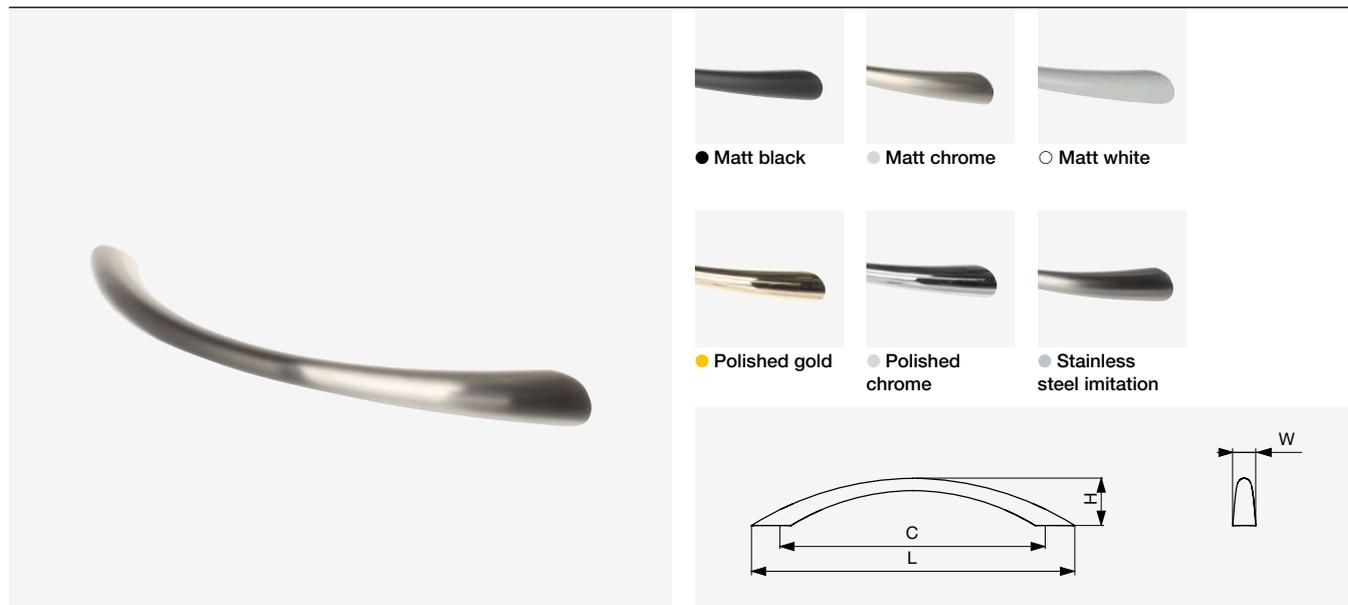

● Matt nickel

Dimension C [mm]	Matt nickel	Matt black	Matt chrome	Matt white	Polished gold	Polished chrome	Stainless steel imitation	Dimension L [mm]	Dimension H [mm]	Dimension W [mm]
96	F001736	F001740	F001734	F001742	F001738	F001732	F007551	112	27.5	10.5
128	F001737	F001741	F001735	F001743	F001739	F001733	F007552	145	27.5	12

⊕ RiexTouch XH35 Handle

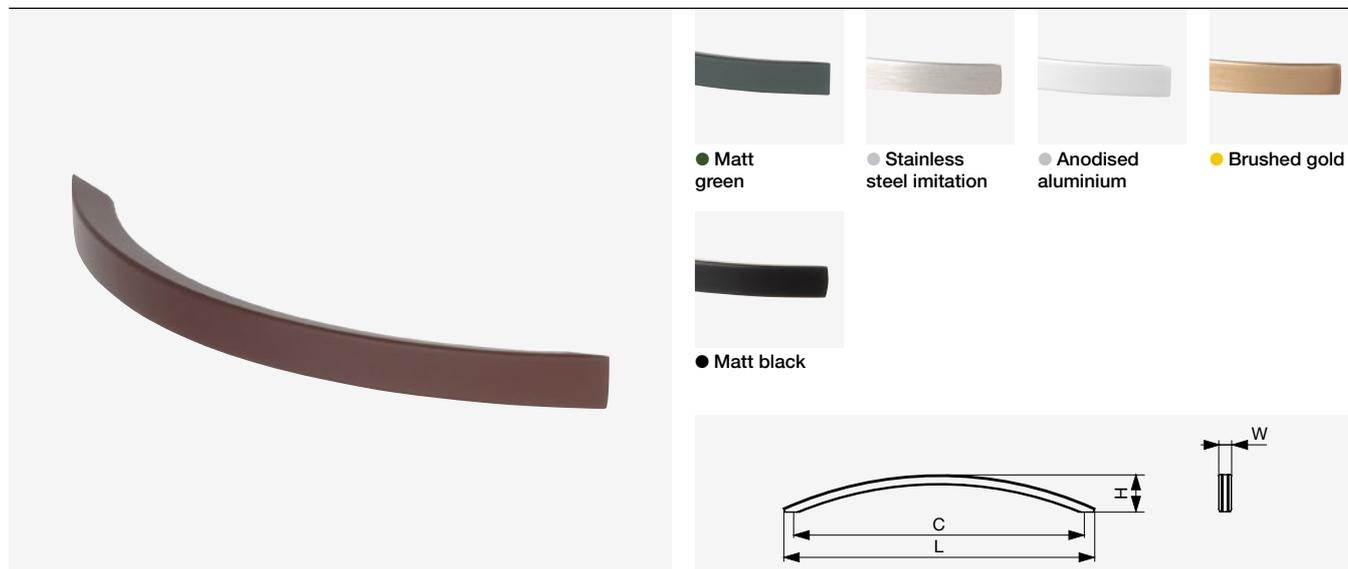


● Burgundy

Dimension C [mm]	Burgundy	Matt green	Stainless steel imitation	Anodised aluminium	Brushed gold	Matt black	Dimension L [mm]	Dimension H [mm]	Dimension W [mm]
96	F008334	F008339	x	x	x	x	116		
128	F008335	F008340	F002167	F002158	F002161	F002164	148		
160	F008336	F008341	F002168	F002159	F002162	F002165	182		
192	F008337	F008342	x	x	x	x	278	34	11
224	F008338	F008343	x	x	x	x	244		
256	x	x	F002169	F002160	F002163	F002166	276		

▲ CONTENT


➤ RieuxTouch XH70 Handle

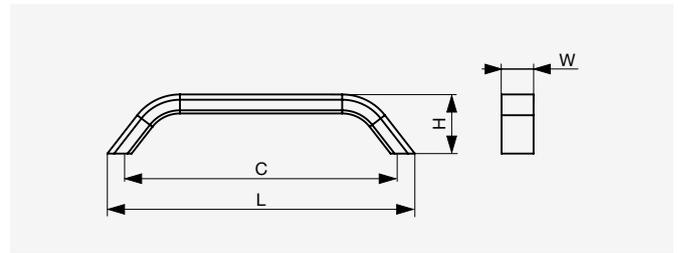

● Matt green

Dimension C [mm]	Matt green	Burgundy	Matt black	Matt white	Dimension L [mm]	Dimension H [mm]	Dimension W [mm]
96	F008350	F008344	F008353	F008347	112	28	15
128	F008351	F008345	F008354	F008348	144		
160	F008352	F008346	F008355	F008349	176		


➤ RieuxTouch XH64 Handle

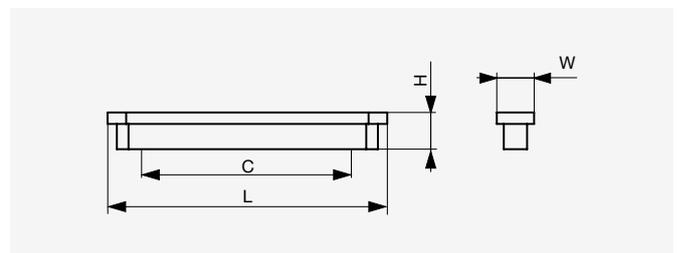


● Matt black

Dimension C [mm]	Matt black	Matt green	Dimension L [mm]	Dimension H [mm]	Dimension W [mm]
32	F008324	F008329	56	16	16
64	F008325	F008330	88		
96	F008326	F008331	120		
128	F008327	F008332	152		
160	F008328	F008333	184		

⊕ RiexTouch XH06 Handle

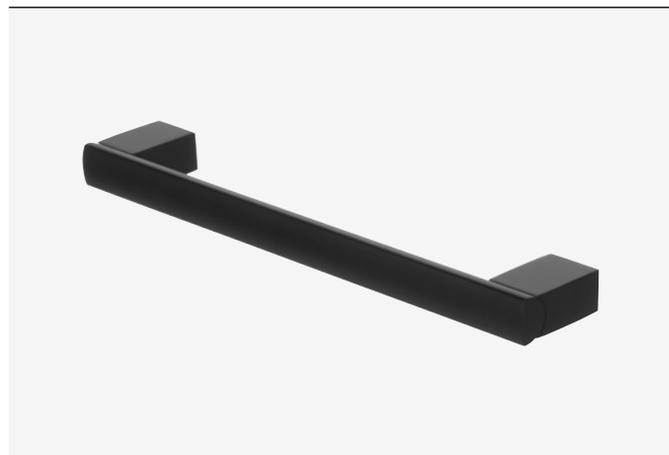

● Anodised aluminium ● Brushed nickel ● Polished chrome ● Stainless steel imitation

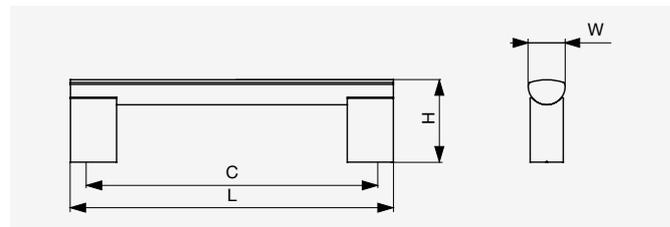

● Matt black


Dimension C [mm]	Matt black	Anodised aluminium	Brushed nickel	Polished chrome	Stainless steel imitation	Dimension L [mm]	Dimension H [mm]	Dimension W [mm]
96	F007298	F001256	F001271	F001301	F001286	108	36	16
128	F007299	F001257	F001272	F001302	F001287	140		
160	F007300	F001258	F001273	F001303	F001288	172		
192	F007301	F001259	F001274	F001304	F001289	204		
224	F007302	F001260	F001275	F001305	F001290	344		
256	F007303	F001261	F001276	F001306	F001291	268		
288	F007304	F001262	F001277	F001307	F001292	300		
320	F007305	F001263	F001278	F001308	F001293	332		
384	F007306	F001264	F001279	F001309	F001294	396		
448	F007307	F001265	F001280	F001310	F001295	460		
480	F007308	F001266	F001281	F001311	F001296	492		
544	F007309	F001267	F001282	F001312	F001297	556		
672	F007310	F001268	F001283	F001313	F001298	684		
736	F007311	F001269	F001284	F001314	F001299	748		
768	F007312	F001270	F001285	F001315	F001300	780		

▲ CONTENT

⊕ RiexTouch XK15 Knob




- Matt chrome
- Matt nickel

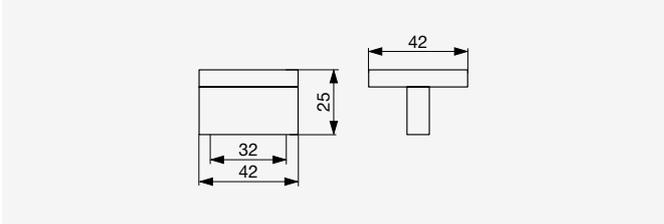


- Brushed nickel

Brushed nickel	Matt chrome	Matt nickel
F002259	F002260	F007555

⊕ RiexTouch XK08 Knob




- Polished chrome
- Matt nickel

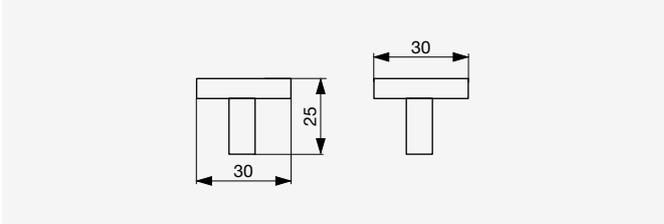

- Matt chrome

Matt chrome	Polished chrome	Matt nickel
F002249	F002248	F007553

➤ RiexTouch XK14 Knob



● Matt chrome




● Brushed nickel



● Polished chrome




● Matt nickel



Matt chrome	Brushed nickel	Polished chrome	Matt nickel
F002258	F002256	F002257	F007554


➤ RiexTouch XH63 Knob



● Matt black



● Matt gold

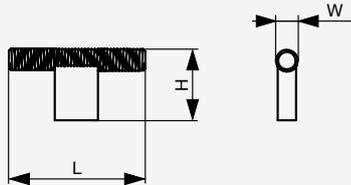

Matt black	Matt gold	Dimension L [mm]	Dimension H [mm]	Dimension W [mm]
F008312	F008318	60	32,5	10

▲ CONTENT


➤ RiexTouch XV44 Hook



● Matt black



○ Matt white ● Brushed nickel ● Polished chrome

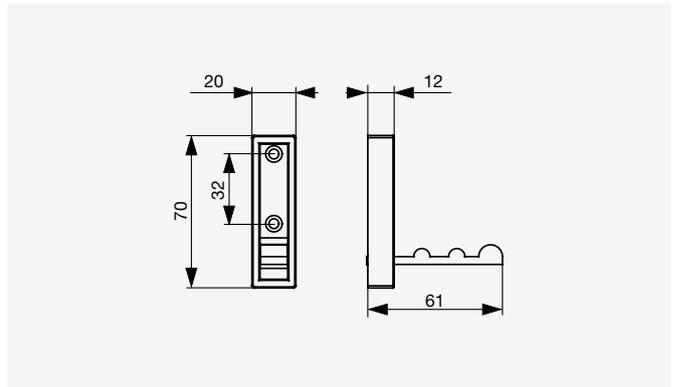

Matt black	Matt white	Polished chrome	Brushed nickel
F008287	F008285	F008286	F008284


➤ RiexTouch XV45 Hook



● Matt black



○ Matt white ● Polished chrome ● Brushed nickel

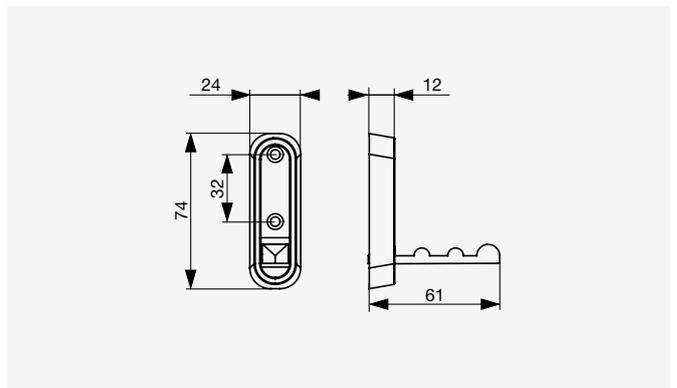

Matt black	Matt white	Polished chrome	Brushed nickel
F008291	F008289	F008290	F008288

⊕ RiexTouch XV38 Hook




● Polished chrome




● Stainless steel imitation

● Matt nickel

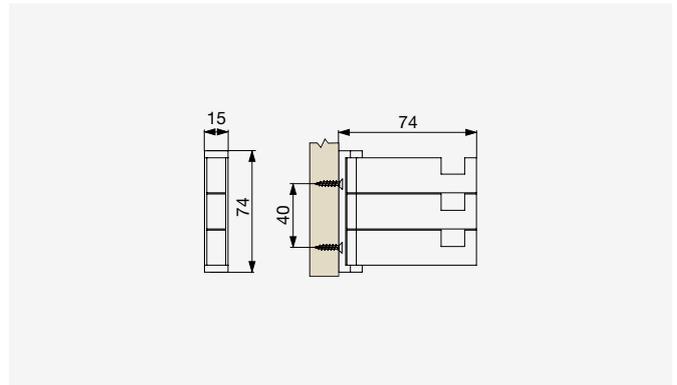

Matt nickel	Polished chrome	Stainless steel imitation
F002644	F002643	F007556

⊕ Riex Mounting Template for Handles

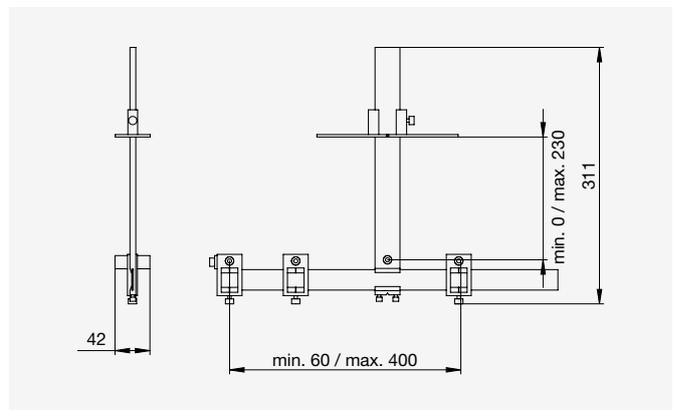

Type	Code
For Handles	F008292



Kitchen Fittings

▲ CONTENT



Riex Kitchen Sorters and Bins

Discover our Italian-produced kitchen sorters. Designed for efficient organization, these products combine functionality with elegant style. Choose from several colour options to enhance the appearance of your kitchen. Experience the excellence of Italian design today and elevate your home organization.


Groups where you can find our products:

- Pull-Out Sorters with Slide
- Pull-Out Sorters and baskets
- Inserted Sorters into Drawers



Pull-Out Sorters with Slide

⊕ Riex GN88 Sorters with Slides, Anthracite

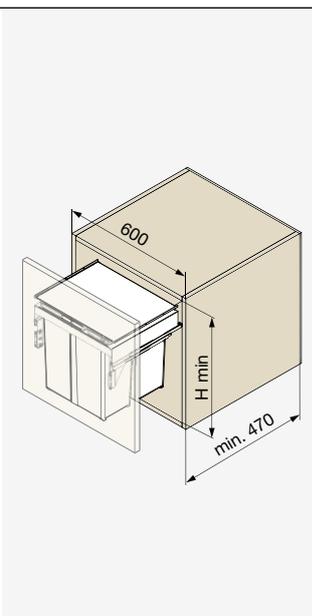

- Total volume up to 80 l
- 3 heights available: H529, H485 and H320 mm
- Full extension slides include soft closing
- Suitable for cabinets with sides thickness from 16 to 19 mm
- Metal lid ideal for placing sponges and gloves

Package content:

- Bins with lids
- Frame
- Pair of slides
- Installation manual



⊕ F007623



⊕ F007624




⊕ F007625

Cabinet width [mm]	Volume of bins [l]	Code	Installation height - H min [mm]
600	2 × 29 + 2 × 8	F007623	485
	2 × 17 + 2 × 8	F007624	320
	2 × 40	F007625	529

▲ CONTENT

⊕ Riex GN87 Sorters with Slides, Anthracite

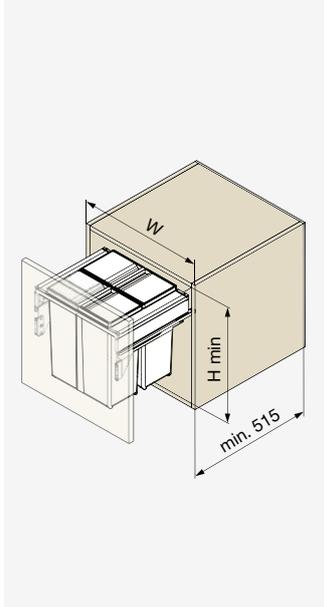


- Available for bases 300, 400, 450, 500, 600 mm
- Total volume up to 80 l
- Bins equipped with lids
- Full extension slides include soft closing
- 3 heights available: H506, H463 and H304 mm
- Suitable for cabinets with sides thickness from 16 to 19 mm
- Metal frame with plastic sides.
- Metal middle brackets.

- Package content:**
- Bins with lids
 - Frame
 - Pair of slides
 - Installation manual



⊕ F007626 [300]

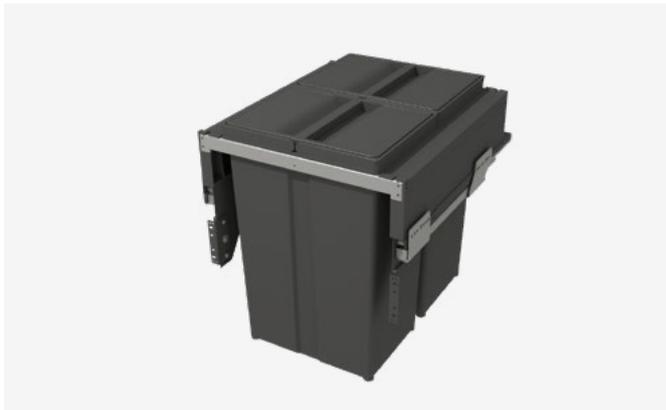

⊕ F007628 [450]



⊕ F007627 [400]



⊕ F007629 [500]

Cabinet width - W [mm]	Volume of bins [l]	Code	Installation height - H min [mm]
300	1 × 40	F007626	506
400	2 × 29	F007627	463
450	2 × 29	F007628	506
500	2 × 40	F007629	506





① F007631 [600]



① F007632 [600]

Cabinet width [mm]	Volume of bins [l]	Code	Installation height - H min [mm]
600	2 × 29 + 2 × 8	F007630	463
	2 × 17 + 2 × 8	F007631	304
	2 × 40	F007632	506

① Riex Fixed Lids / Shelves for GN87, Anthracite

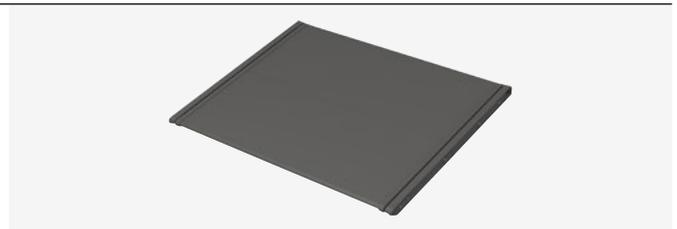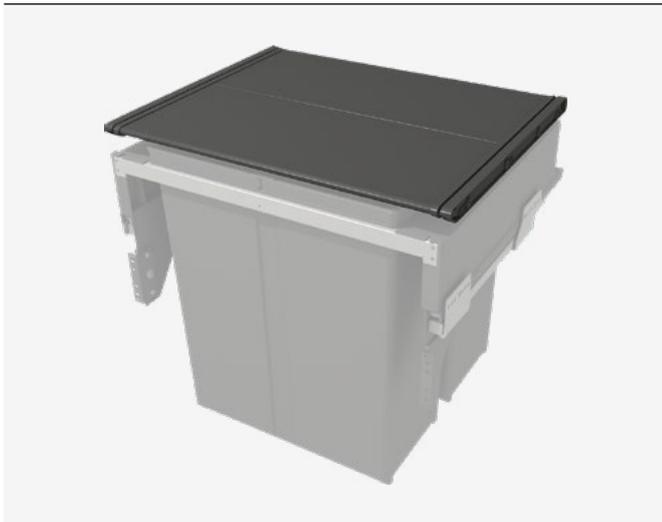

① Plastic version




① Metal version

Cabinet width [mm]	Material	Code
300	Plastic	F008276
	Metal	F008281
400	Plastic	F008275
	Metal	F008280
450	Plastic	F008274
	Metal	F008279
500	Plastic	F008273
	Metal	F008278
600	Plastic	F008272
	Metal	F008277

▲ CONTENT

⊕ Riex GN86 Sorters to Hang on Double Wall Slides, Anthracite

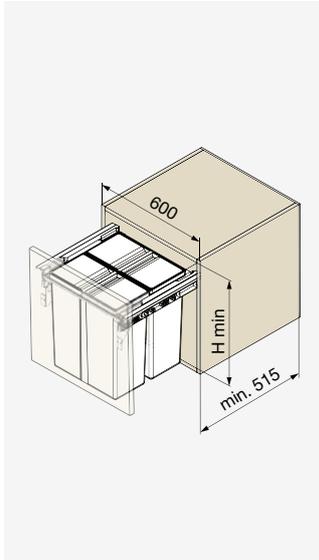

- Sorter for standard [non slim] double-wall drawers
- Universal solution for different kinds of drawers

- Package content:**
- Bins with lids
 - Frame
 - Installation manual

Ⓜ For the complete set, use the double-wall slides in 500 mm or 450 mm length and height ± 86 mm. e.g.: NX40 - F000441 or F000440.



Ⓜ F007633



Ⓜ F007634



Ⓜ F007635

Cabinet width [mm]	Volume of bins [l]	Code	Installation height - H min [mm]
600	2 × 29 + 2 × 8	F007633	463
	2 × 17 + 2 × 8	F007634	298
	2 × 40	F007635	506

⊕ Riex Fixed Lids / Shelves for GN86, Anthracite




Ⓜ F008272



Ⓜ F008277

Cabinet width [mm]	Material	Code
600	Plastic	F008272
	Metal	F008277

⊕ Riex GN09 Sorters to Insert to Drawer, Anthracite

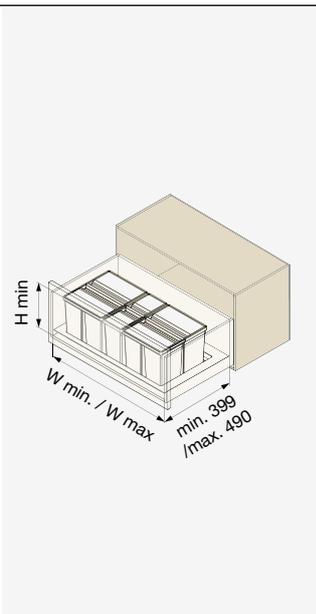

- The tray with bins is simply placed at the bottom of the kitchen drawer
- Big volume of bin up to 26 l
- Ideal solution for under the sink drawer

Package of bins contains:

- Bins with lids

Package of base contains:

- Bottom base

⊕ The base is sold separately



⊕ F007654 + F007655



⊕ F007656 + F007657



⊕ F007658 + F007660




⊕ F007659 + F007660

Cabinet width [mm]	Volume of bins [l]	Code bins	Code base	Installation height H min. [mm]	Base width W min. / W max. [mm]
900	2 × 26 + 1 × 11	F007654	F007655	280	730 / 840
700 / 800	1 × 26 + 2 × 11	F007656	F007657		580 / 740
600	1 × 26 + 1 × 11	F007658	F007660	212	429 / 540
600	1 × 26 + 1 × 11	F007659			

▲ CONTENT

⊕ Riex GN52 Sorters with Slides, Bottom Installation, Anthracite

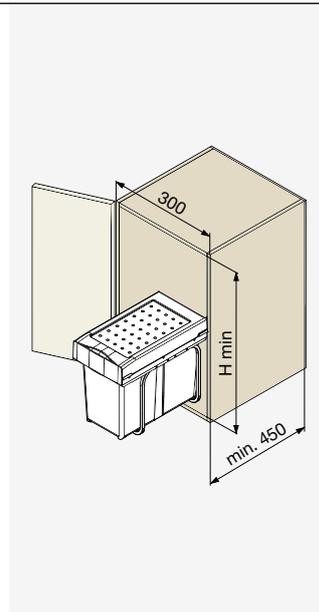

- Basic model for installation on cabinet bottom
- Non automatic pull out
- Easy for installation
- Assembled and ready for installation

- Package content:**
- Bins
 - Frame with lid and slides
 - Installation manual



⊕ F007640




⊕ F007641



⊕ F007642

Cabinet width from [mm]	Volume of bins [l]	Code	Installation height - H min [mm]
300	1 × 40	F007640	537
	1 × 30	F007641	400
	3 × 10	F007642	400

⊕ Riex GN58 Sorters with Bottom Pull-Out System



- Basic model for installation on bottom
- Pulls out by hand
- Various colours

- Package content:**
- Bins with lid
 - Frame with bottom slide system
 - Installation manual



⊕ F007643



⊕ F007644



⊕ F007645



⊕ F007646




⊕ F007647

Cabinet width from [mm]	Volume of bins [l]	Colour	Code	Installation height [mm]
300	2 × 7,5	White	F007643	360
		Light grey	F007644	
	1 × 16	White	F007645	
		Light grey	F007646	
		Grey + stainless steel	F007647	

▲ CONTENT

⊕ Riex GN50 Sorters with Automatic Pull-Out System, Grey

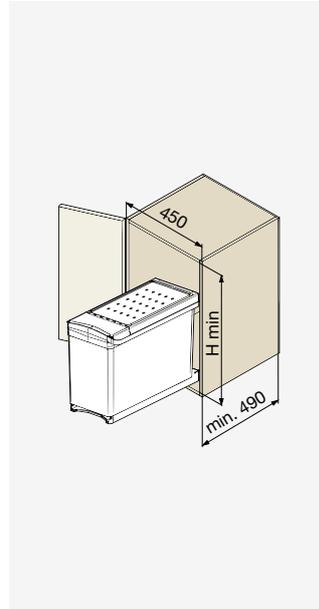

- Simple but clever solution with automatic pull out
- 2 heights and capacities

Package content:

- Bins
- Frame lid and bottom system of slides
- Installation manual

Cabinet width from [mm]	Volume of bins [l]	Code	Installation height - H min [mm]
450	2 × 21	F007648	433
	2 × 16	F007649	372

⊕ Riex GN37 Sorters



- Simple round model of waste bin with automatic opening lid
- Stainless steel or plastic case


Package content:

- Bin
- Frame for installation
- Installation manual

Cabinet width from [mm]	Volume of bins [l]	Colour	Code	Installation height [mm]
400	13	Grey + stainless steel	F007650	400
		Black + stainless steel	F007651	
		White	F007652	
		Grey	F007653	

Pull-Out Sorters and baskets

⊕ Riex GN57 Sorters with Bottom Slides, Grey

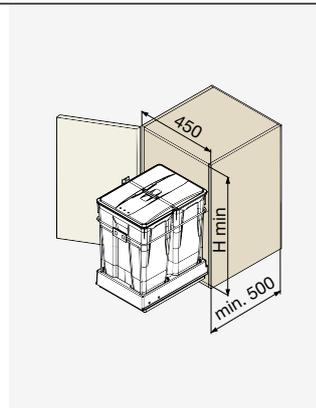

- Simple but solid solution with bottom slides
- Front door brackets are available as an option
- Multi use container can be hanged on kitchen cabinet door - under worktop

Package content:

- Bins with lids
- Frame with bottom fixed slides
- Installation manual



⊕ F007636



⊕ F007637

Cabinet width from [mm]	Volume of bins [l]	Code	Installation height - H min [mm]
450	2 × 35	F007636	600
	2 × 30	F007637	518

⊕ Riex GN57 Sorter Multiuse Container, Grey



⊕ F007639



Code	Type of accessories
F007639	Multi use container 5 l grey with green lid

⊕ Riex GN57 Sorter Front Door Brackets




⊕ F007638

Code	Type of accessories
F007638	Door fix brackets

▲ CONTENT

Laundry and Bathroom Equipment

⊕ Riex GN76 Laundry Bins for Hang on Double Wall Slides, White



- Universal solution for different drawer brands
- All in white

Package content:


- Bins
- Frame for installation in double wall slides
- Installation manual



⊕ For the complete set, use the double-wall slides in 500 mm length and height ± 86 mm. e.g.: NX40 - F000441

Cabinet width - W [mm]	Volume of bins [l]	Code	Installation height [mm]
600	2 × 40	F007679	506
	1 × 50	F007680	
450	1 × 50	F007681	
400	1 × 40	F007682	

⊕ Riex GN77 Tilt-Out Laundry Bins, White



- All accessories available
- Hinges and opening mechanism to be provided by customer

Package content:

- Bins with metal frame

The door must be attached to 2 hinges and opening mechanism.
 • Recommended full overlay hinges - e.g. F000001 or F000058
 • Recommended opening mechanism F008075



Cabinet width from [mm]	Volume of bins [l]	Code	Installation height [mm]
450	1 × 50	F007683	504
500	1 × 40	F007684	

⊕ Riex GM04 and GM05 Undersink Inserts



- Enclosure to protect the bottom cutout at the under sink drawer
- Available in two depths and equipped with lateral/frontal trays
- All models are available in anthracite and white colour



⊕ F007707




⊕ F007674




⊕ F007675




⊕ F007678

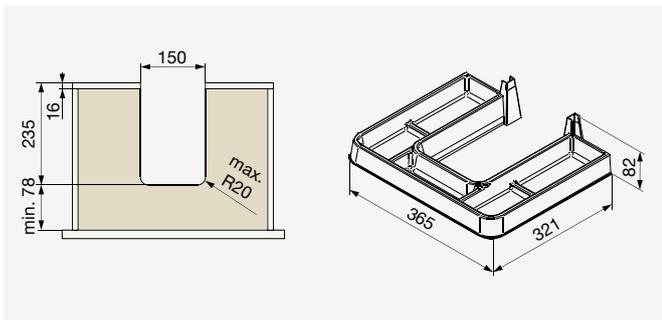


⊕ GM04 [L] - F007673, F007707

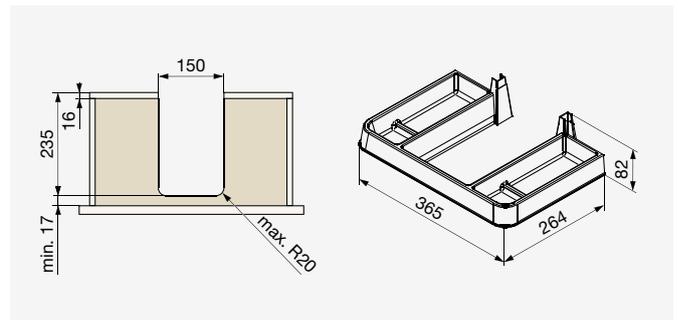

⊕ GM04 [S] - F007674, F007708

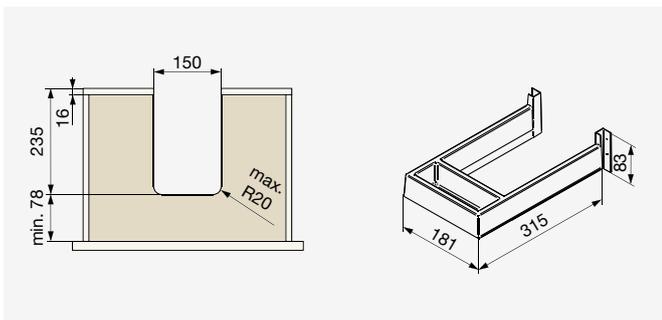

⊕ GM05 [L] - F007675, F007677

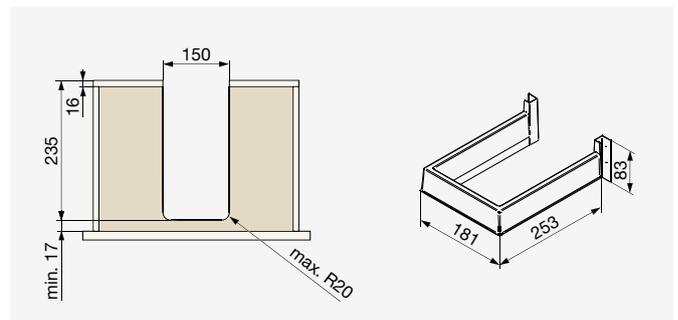

⊕ GM05 [S] - F007676, F007678


Model	Cabinet width from [mm]	Min. drawer depth [mm]	Colour	Code
GM04	500	350 [L]	White	F007673
			Anthracite	F007707
		270 [S]	White	F007674
			Anthracite	F007708
GM05	300	350 [L]	White	F007675
			Anthracite	F007677
		270 [S]	White	F007676
			Anthracite	F007678

▲ CONTENT


⊕ Riex GM22 Cutlery trays in anthracite




- Clever solution of cutlery tray
- We recommend adding an anti-slip mat to the free area next to the cutlery trays
- The dimensions are independent of the width of the drawer
- Precut for length 474 mm - most used depth for 500 mm drawers
- Side versions are possible to fit to left or right side of drawer

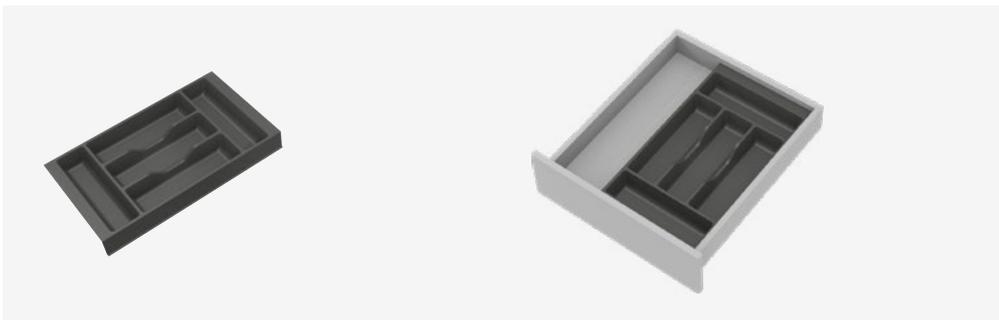


① F007661 - can be placed on both the left and right side of the drawer




① F007661

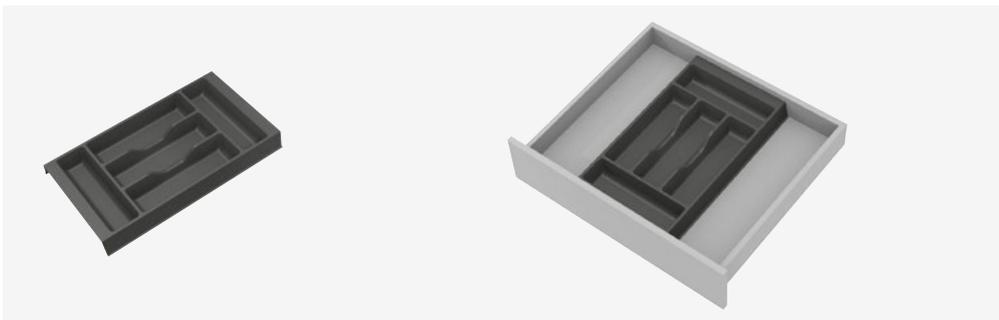


① F007662 - can be placed in the center of the drawer

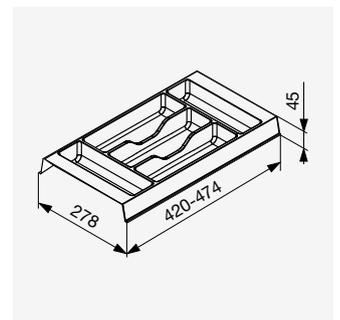

① F007662

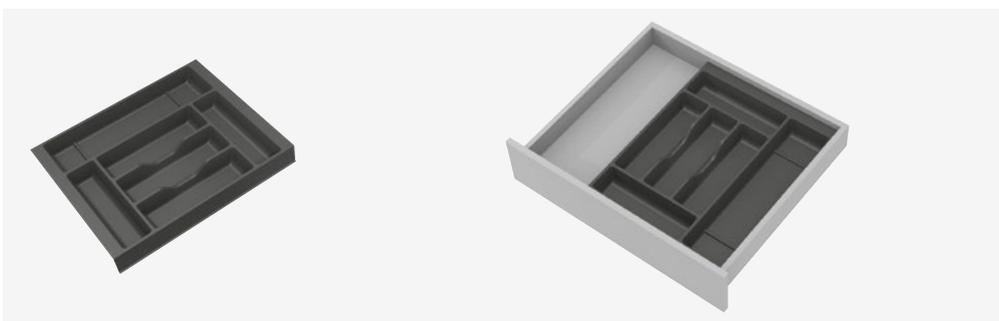

① F007663 - can be placed on both the left and right side of the drawer

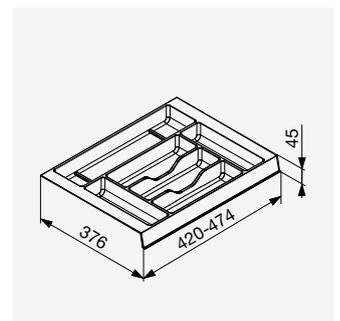

① F007663



① **F007661** - can be placed on both the left and right side of the drawer

① **F007664**

Cutlery tray width [mm]	Position	Code	Depth
266	Side [left or right]	F007661	420 - 474
278	Central	F007662	
376	Side [left or right]	F007663	
240	Side [left or right]	F007664	

① We recommend combining with an anti-slip mat e.g. **F003490**

① **Example of application** - Possible to combine all cutlery trays to fit the ideal combination. For example **F007663 + F007662 + F007664**.



🔗 Accessories for Cutlery Trays GM22



① **F007665**




① **F007666**

Code	Type of sortiment	For product
F007665	Knife holder [wood]	F007663; F007664
F007666	Chopping board	F007664

Ventilation Grids and Duct Vents

⊕ Riex GV44 Aluminium Ventilation Grid

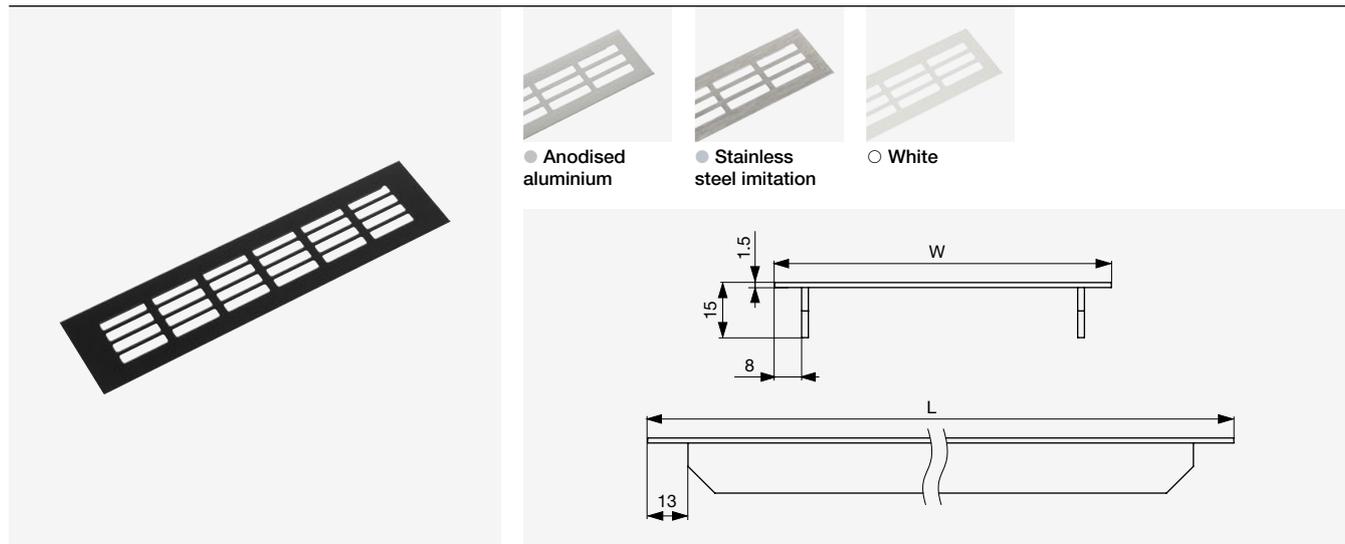

● Matt black

Width W [mm]	Length L [mm]	Matt black	Anodised aluminium	Stainless steel imitation	White
60	250	F007363	F000951	F000974	F000997
	400	F007364	F000952	F000975	F000998
	500	F007365	F000953	F000976	F000999
	600	F007366	F000954	F000977	F001000
	800	F007367	F000955	F000978	F001001
	1000	F007368	F000956	F000979	F001002
80	250	F007369	F000957	F000980	F001003
	400	F007370	F000958	F000981	F001004
	500	F007371	F000959	F000982	F001005
	600	F007372	F000960	F000983	F001006
	800	F007373	F000961	F000984	F001007
	1000	F007374	F000962	F000985	F001008
100	250	F007375	F000963	F000986	F001009
	400	F007376	F000964	F000987	F001010
	500	F007377	F000965	F000988	F001011
	600	F007378	F000966	F000989	F001012
	800	F007379	F000967	F000990	F001013
	1000	F007380	F000968	F000991	F001014
150	400	F007381	F000969	F000992	F001015
	500	F007382	F000970	F000993	F001016
	600	F007383	F000971	F000994	F001017
	800	F007384	F000972	F000995	F001018
	1000	F007385	F000973	F000996	F001019






Wardrobe Fittings



▲ CONTENT

⊕ Riex VT24
Oval Wardrobe Bar, 30 × 15 mm

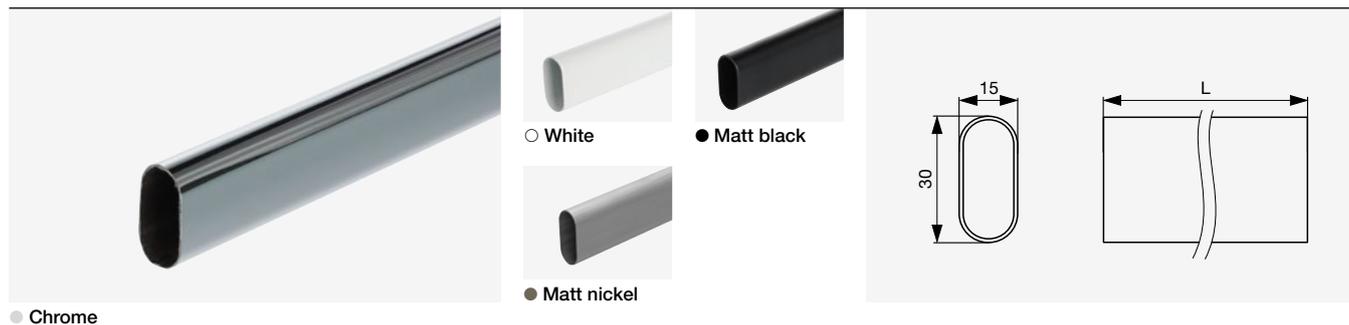

● Chrome

Colour	Thickness [mm]	Length [mm]	Code	Material
Chrome	0.7	556	F008609	Steel
		656	F008610	
		756	F008611	
		856	F008612	
		956	F008613	
		1056	F008614	
		1156	F008615	
		3000	F001096	
Matt black	0.7	3000	F001099	
		556	F010328	
		656	F010329	
		756	F010330	
		856	F010331	
		956	F010332	
		1056	F010333	
		1156	F010334	
White	1.0	3000	F001100	
Matt nickel	0.7	3000	F008623	


⊕ Riex VT24 / VT14
Oval Bar Holder, 30 × 15 mm



● Matt nickel

Colour	Code	Material	Mounting
Nickel	F001117	Steel	Side
Nickel	F001118		
Chrome	F001119	Zinc	
White	F001120		
Matt black	F001121		


⊕ Riex VT23
Round Wardrobe Bar, Diameter 25 mm

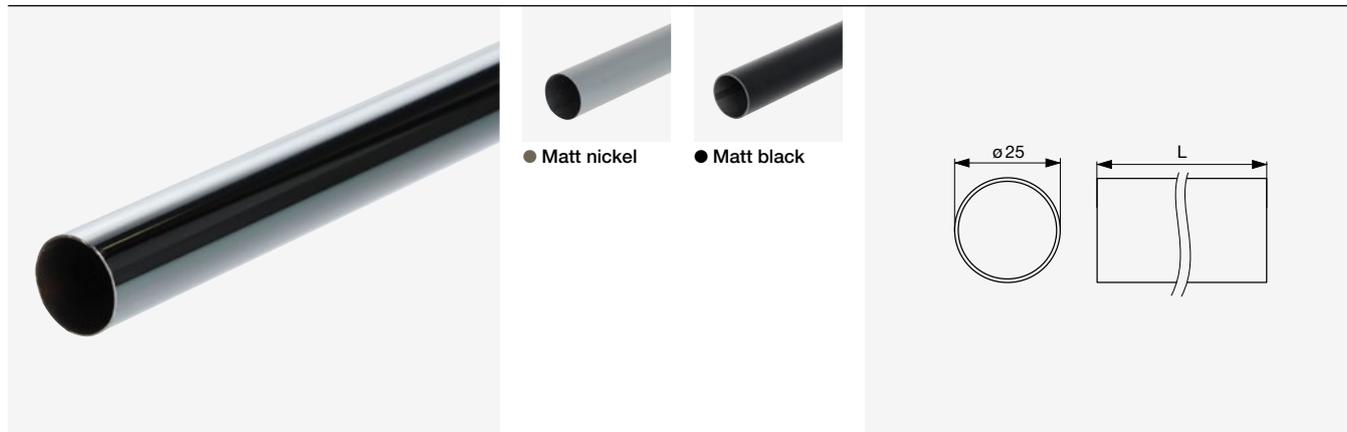

● Chrome

Colour	Thickness [mm]	Length [mm]	Code	Material
Chrome	0.7	562	F008616	Steel
		662	F008617	
		762	F008618	
		862	F008619	
		962	F008620	
		1062	F008621	
		1162	F008622	
Matt nickel	1.0	3000	F004988	
		3000	F004989	
Matt black	0.7	3000	F008624	
Matt black			F008625	

⊕ Riex VT23
Round Bar Holder, Diameter 25 mm


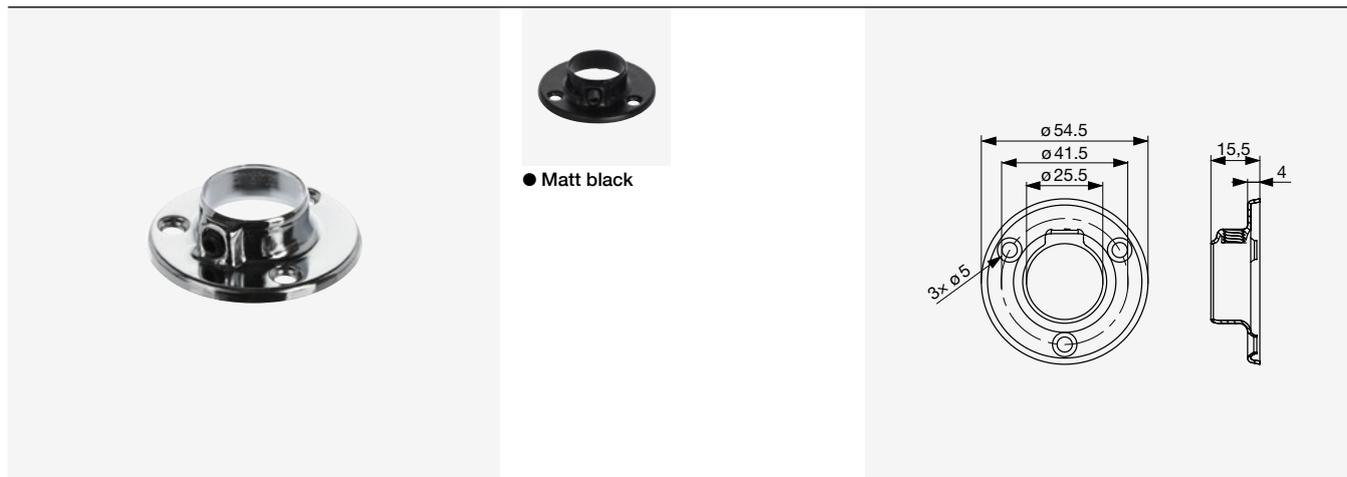


● Chrome

Colour	Code	Material	Mounting
Chrome	F005026	Steel	Side
Matt black	F008626		

▲ CONTENT

⊕ Riex VX34
Square Wardrobe Bar

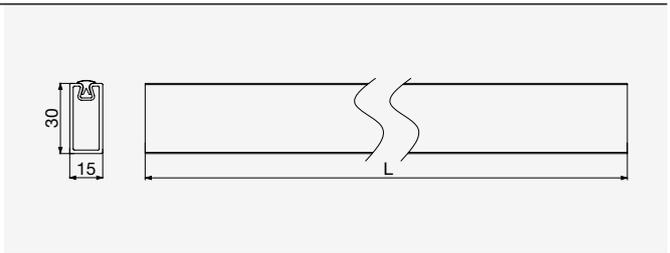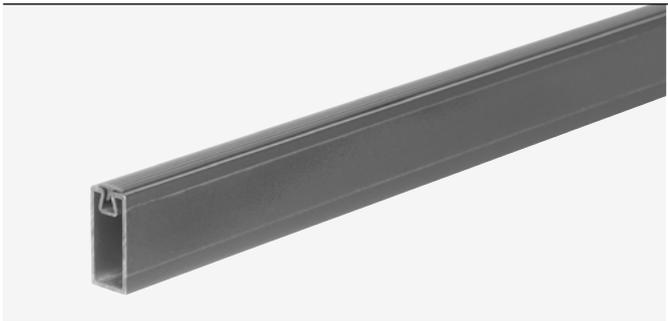

- Aluminium bar
- Dark grey colour

Length L [mm]	Code	Width [mm]	Height [mm]
1000	F000596	15	30
3000	F008629		






Lights and Electrical Equipment



▲ CONTENT

⊕ Riex EL59 Power 12 W/m, Very High Efficiency

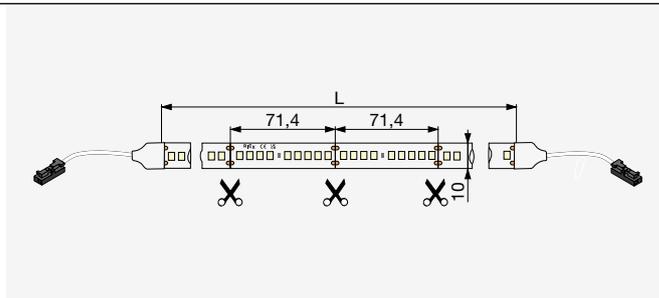

⊙ L = 5 m, module 9 diodes


ENERGY
 Riex
 RIEX F008643
 A
 B
 C
 D
 E
 F
 G
C
 5 kWh/1000h

5
 5 years
 Warranty

- LED strip with very high efficiency 170 lm/W
- Saving energy and get maximum light from power
- High quantity of diodes make fuller line of light and invisible light dots with opal / black covers on profiles on p. 13.25 - 13.36 [Catalogue 2022]
- Cables with MINI connectors from both sides for faster application

White temperature	Roll 5 m	Temperature [K]	Light output [lm/m]	Diodes/m	CRI Ra
Warm	F008643	3000	1740	126	90
Neutral	F008644	4000			

⊕ Riex EL65 Power 12 W/m, Full Spectrum

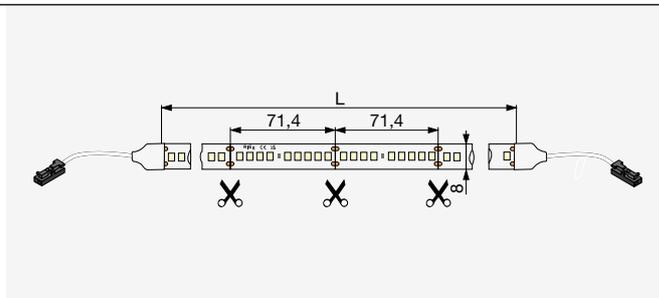

⊙ L = 5 m, module 9 diodes

ENERGY
 Riex
 RIEX F008645
 A
 B
 C
 D
 E
 F
 G
E
 6 kWh/1000h


5
 5 years
 Warranty

- LED strip full spectrum with minimised emission of blue part of light
- Recommended for sensitive people, bedrooms, living areas etc.
- High light quality reduces distorted colour perception
- High quantity of diodes makes fuller line of light and invisible light dots with opal / black covers on profiles on p. 13.25-13.36 [Catalogue 2022]
- Cables with MINI connectors from both side for faster application

White temperature	Roll 5 m	Temperature [K]	Light output [lm/m]	Diodes/m	CRI Ra
Warm	F008645	3000	1440	126	90
Neutral	F008646	4000			

Power supply - see p. 13.14 - 13.16 [Catalogue 2022].
 The extended warranty is conditional on installation in aluminium profiles and the use of recommended power supplies.

⊕ Riex EL72 Power 9 W/m COB

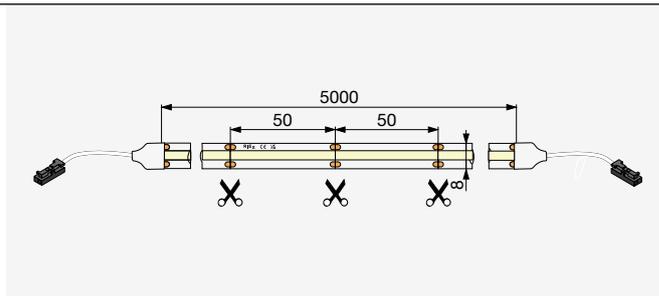

Ⓜ L = 5 m, module 16 diodes

ENERGY
 Riex
 RIEX F008648

A
 B
 C
 D
 E
 F
 G

F

5
 kWh/1000h

3
 3 years
 Warranty

- COB* LED strips with medium power
- Invisible diodes make continuous line of light
- Cables with MINI connectors from both sides for faster application

* COB - Chip on Board - LEDs are installed directly on circuit board with minimum gap


White temperature	Roll 5 m	Temperature [K]	Light output [lm/m]	Diodes/m	CRI Ra
Warm	F008647	3000	800	320	90
Neutral	F008648	4000	840		

▲ CONTENT

⊕ Riex EL25
LED Power Supply 24 V



- Designed for powering LED lights
- Slim design
- Power cable 1.5 m with plug
- Output cable 1.5 m with MINI connector*
- Warranty 5 years**

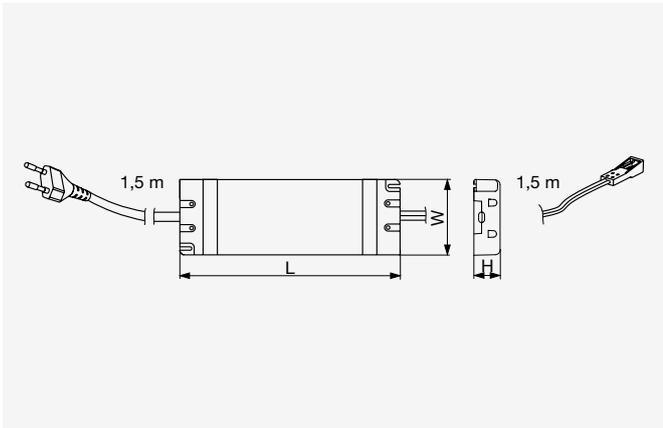

Driver selection and installation:
See information with table on p. 13.16 [Catalogue 2022].

Input plug	Power [W]	Output cable w. MINI	Code	Current [A]	Size L x W x H [mm]
EU 	15	1	F004347	0.625	103 x 36 x 17
	30	1	F004350	1.25	
	50	1	F004352	2.1	
	75	2	F004353	3.125	
	100*	2	F004354	4.16	
UK 	30	1	F004357	1.25	160 x 58 x 18
	50	1	F004358	2.1	
	75	2	F004359	3.125	
	100*	2	F007702	4.16	

* Connectors MINI can't load wattage over 60 W. Stronger wires should be connected directly to output terminal box. Wiring operation should be done by authorised person.

** The extended warranty is subject to installation according to the instructions, without overloading, with sufficient ventilation. Supply voltage must comply with EN 60038, damage due to non-compliant mains voltage cannot be claimed.


Riex EL28 LED Power Supply 24 V



- Designed for powering LED lights
- Slim design for application in limited space
- Warranty 5 years*
- Power cable 1.5 m with plug
- Output - terminal block



Wiring operation should be done by authorised person.

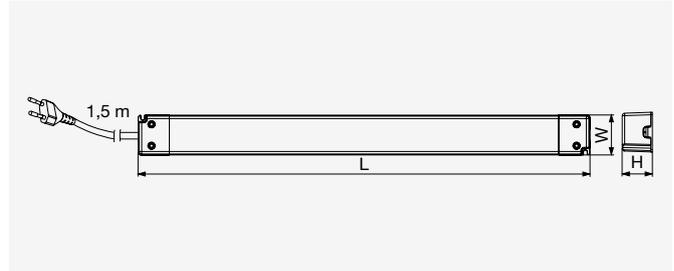

Input plug	Power [W]	Code	Current [A]	Size L x W x H [mm]
EU 	150	F004355	6.25	360 x 32 x 24
UK 		F007703		

LED Driver and Recommended Length of LED Strip

Calculation of the required power [valid for 12 V and 24 V]:

$$\text{Driver minimum power} \geq \text{Length of LED strip} \times \text{Power of LED strip} \times \text{Power reserve 10\%}$$

$$DP [W] \geq L [m] \times LP [W/m] \times R 1.1$$

Driver power DP [W]	15	20	30	50	75	100
LED strip power LP [W/m]	Length max. L [m]					
5*	2.7	3.6	5.4	9	13.6	15
6	2.2	3	4.5	9	5	5
9.6	1.4	1.8	2.8	4.7	5	5
12	1.1	1.5	2.2	3.7	5	5
14	0.9	1.2	1.9	3.2	4.8	5
16	0.8	1.1	1.7	2.8	4.2	5
21	0.6	0.8	1.2	2.1	3	×

* LED strip 5 W/m Riex EL63 Constant current type can work up to 15 m length

Ensure sufficient ventilation, do not cover, do not install close to heat source or electrical appliances. Do not use long cables, install drivers close to lights and switches.


Power reserve:

Recommended power reserve is approximately 10 - 20%, higher for frequent switching and permanent operation.

* The extended warranty is subject to installation according to the instructions, without overloading, with sufficient ventilation. Supply voltage must comply with EN 60038, damage due to non-compliant mains voltage cannot be claimed.

▲ CONTENT

⊕ Riex EL44 Power 4.8 W/m

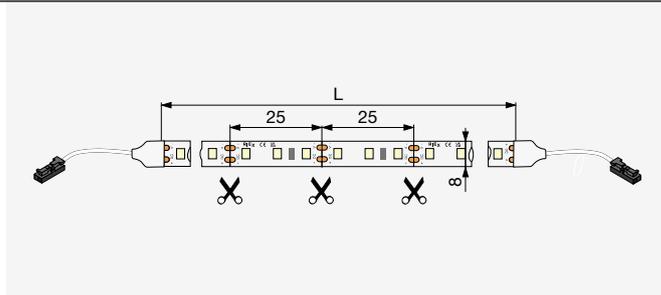

⊙ L = 5 m, module 3 diodes

ENERGY
 Riex
 RIEX F008639

A
B
C
D
E
F
G

F


3 kWh/1000h

- LED strip with low power designed mainly for ambient lighting
- High efficiency
- Cables with connectors MINI from both sides for faster application

White temperature	Roll 5 m	Roll 30 m	Temperature [K]	Light output [lm/m]	Diodes/m	CRI Ra
Warm	F008639	F008641	2700	480	120	90
Neutral	F008640	F008642	4000			

Power supply - see p. 13.20 [Catalogue 2022].

⊕ Riex EL43 Power 12 W/m

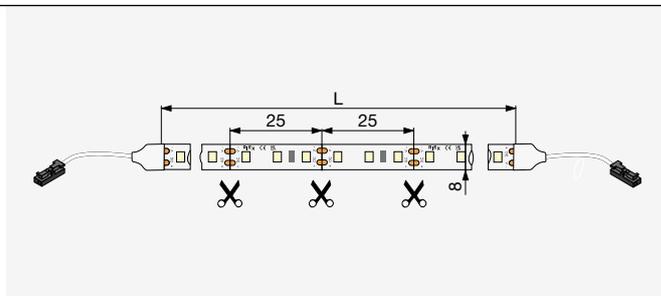

⊙ L = 5 m, module 3 diodes

ENERGY
 Riex
 F004682

A
B
C
D
E
F
G

E

6 kWh/1000h

- LED strip with medium power
- High efficiency
- Cables with connectors MINI from both sides for faster application


White temperature	Roll 5 m	Roll 30 m	Temperature [K]	Light output [lm/m]	Diodes/m	CRI Ra
Warm	F004682	F008309	3000	1400		
Neutral	F004683	F008310	4000	1440	120	80
Cold	F004684	F008311	6000	1470		

Power supply - see p. 13.20 [Catalogue 2022].

⊕ Riex EL15 LED Power Supply 12 V



- Designed for powering LED lights
- Slim design
- Power cable 1.5 m with plug
- Output cable with MINI connector*
- Warranty 3 years*

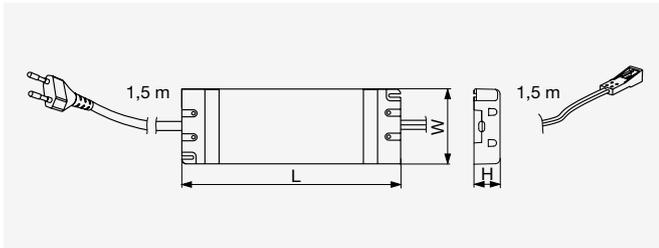

Calculation of the required power:
 Driver power [W] \geq Length of LED strip [m] \times Power of LED strip [W/m]
 $\times 1.1$ [Power reserve 10%]

Driver selection and installation:

See information with table in p. 13.16 [Catalogue 2022].


In case of loading more than 50 W to one output it is necessary to connect wires directly to terminal. Wiring operation should be done by authorised person.

Input plug	Power [W]	Output cable w. MINI	Code	Current [A]	Size L x W x H [mm]
EU 	30	1	F004343	2.5	147 x 48 x 24
	60	2	F004344	5	185 x 64 x 22
	80	2	F004345	6.67	170 x 57 x 32
UK 	30	1	F007692	2.5	147 x 48 x 24
	60	2	F007693	5	185 x 64 x 22
	80	2	F007694	6.67	170 x 57 x 32

⊕ Riex EL17 LED Power Supply 12 V with Direct Output



- Designed for powering LED lights
- Slim design
- Power cable 1.5 m with plug
- Body with MINI sockets for direct installation
- Warranty 3 years*

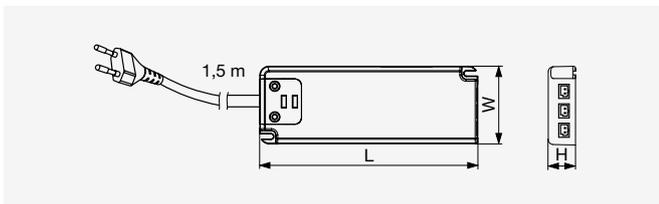

Driver selection and installation:

See information with table in p. 13.16 [Catalogue 2022].

Input plug	Power [W]	Output cable w. MINI	Code	Current [A]	Size L x W x H [mm]
EU 	15	5	F004341	1.25	128 x 46 x 17
	30	6	F004342	2.5	184 x 63 x 22
UK 	15	5	F007695	1.25	128 x 46 x 17
	30	6	F004886	2.5	184 x 63 x 22

* The extended warranty is subject to installation according to the instructions, without overloading, with sufficient ventilation. Supply voltage must comply with EN 60038, damage due to non-compliant mains voltage cannot be claimed.

Sensors and Accessories


Control the lights by sensors installed in aluminium LED profiles. More ways of control - by touch at any position of profile, by waving or touch at position of sensor. Wireless Wifi controllers to control by smartphone or by remote control. Remote control cooperating with Wifi controllers for single colour or universal for RGB.



⊕ Riex EC51 Touch Dimmer to LED Profile





⊕ F007929

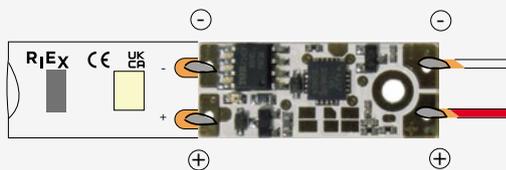

- Touch sensor - switch light on / off by touching of any place of LED profile with installed sensor
- Maximum length of LED profile 3 m
- Dimming function by long touch
- Lighting diode for orientation, can be permanently switched off by soldering jumpers
- Size 10 x 27 mm, minimum width of LED profile 10 mm
- Voltage 12 / 24 V DC
- Max. power 90 W
- Installation by soldering, included stainless steel screw for connection
- Will only work on anodised or raw aluminium profiles up to 3 m length, won't work with painted profile [paint layer insulate signal from touch]
- Power supply Riex is recommended, don't work with grounded power supply and with battery
- LED profile must not touch wall or any other grounded object

Instruction

- Drill 2 mm hole in the profile according sensor position, make thread by enclosed screw without sensor [recommended].
- Solder input cable on input side [closer to hole] and LED strip on output side with right polarity [tip soldering iron is recommended].
- Be aware - tin or cable must not connect any other part of sensor, only soldering parts!
- Apply insulation tape on back side of sensor before installation to protect connection between sensor and profile.
- Put in place and screw into the drilled hole [gently tighten]. Use only included screw made from stainless steel.

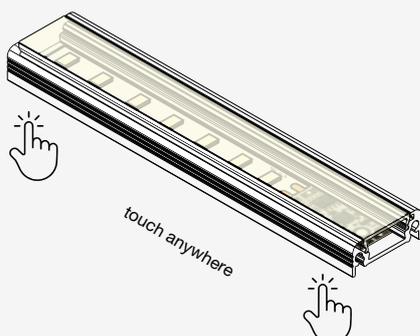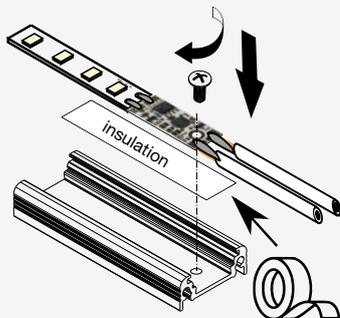

Colour of control diode	Code
Blue	F007929
White	F007930
Without diode	F007931

⊕ Riex EC52 Touchless Dimmer to LED Profile CCT




① F007932



① Single colour - connected output



① CCT [dual] colour - connection each channel

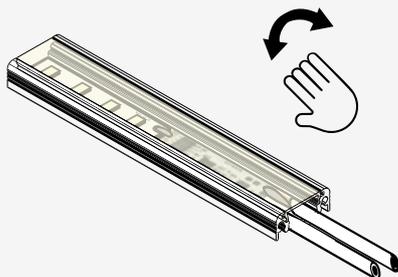

① Wave above sensor

- Touchless sensor - switch light on / off by waving above of sensor
- Dimming function by long covering
- Can be used for CCT [dual colour] LED strips - by touching setting jumper
- To change white temperature wave twice and change colour by long covering
- Size 10 × 35 mm, minimum width of LED profile 10 mm
- Voltage 12 / 24 V DC
- Max. power 90 W
- Installation by soldering

Instruction

- Solder input cable on input side [IN] and LED strip on output side with right polarity [tip soldering iron is recommended].
- For single colour LED strip connect both outputs together by tin - see instructions.
- For CCT [dual colour] LED strip connect each channel separately - see instructions.
- Be aware - tin or cable must not connect any other part of sensor, only soldering parts!
- Apply insulation tape on back side of sensor before installation to protect connection between cables, LED strip and profile.
- To change functionality from single colour to CCT touch set jumper for 5 second, then control LED flashes with multiple colours, finally LED should be red
- Another long touch for 5 seconds switches sensor to submenu for type of LED strip. Change by short touch colour from red to yellow, then confirm by long touch 5 second.

Code

F007932


⊕ Riex EC54 Touch Dimmer to LED Profile CCT




- Touch sensor - switch light on / off by touching of sensor - spring touching cover of LED strips [diffusor]
- Dimming function by long touch
- Can be used for CCT [dual colour] LED strips - by touching setting jumper
- To change white temperature touch twice [double click]
- Size 10 × 35 mm, minimum width of LED profile 10 mm
- Voltage 12 / 24 V DC
- Max. power 90 W
- Installation by soldering

Instruction


- Solder input cable on input side [IN] and LED strip on output side with right polarity [tip soldering iron is recommended].
- For single colour LED strip connect both outputs together by tin - see instructions.
- For CCT [dual colour] LED strip connect each channel separately - see instructions.
- Be aware - tin or cable must not connect any other part of sensor, only soldering parts!
- Apply insulation tape on back side of sensor before installation to protect connection between cables, LED strip and profile.
- To change functionality from single colour to CCT touch by paper clip [or similar metal object] SET jumper for 5 second, then control LED flashes with multiple colours, finally LED should be white.
- Touch SET jumper for short time to change colour from white to red.
- Touch spring for short time to change colour from red to yellow
- Touch SET jumper for short time to confirm change, control LED flashes with multiple colours

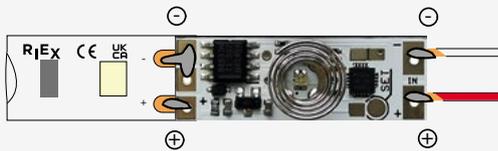

⊕ Single colour - connected output

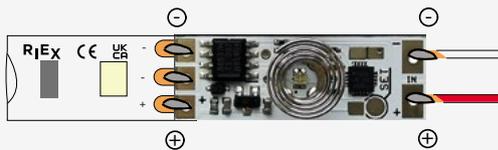

⊕ CCT [dual] colour - connection each channel

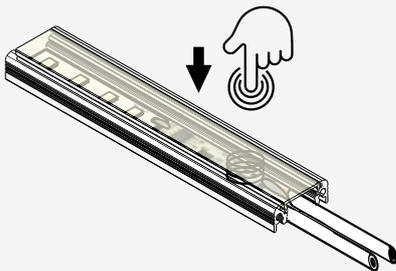

Code

F007934

⊕ Riex EC47 Wifi Controller Tuya Single Colour



- Single colour Wi-Fi controller for LED strips and lights
- Designed for single colour LED lights
- Compatible with Tuya solution, Bluetooth can also be used
- Voltage 12 / 24 V DC
- 2 outputs per 7,5 A, total 15 A
- Max. power 180 W [12 V], 240 W [24 V]
- Support WiFi 2.4 GHz 802.11 b / g / n
- Stand by consumption <0.5 W
- Input: terminal connector
- Output: terminal connector
- Compatible with Riex remote control


Instruction

- Install Tuya Smart application [QR or store]
- Register or login to account [limited functionality is possible without account]
- Connect the power and output cables according instruction diagram
- Connect controller to power supply, press „SET“ for long time or switch on / off 4 times
- Open app, phone will automatically find device, if not, click „+“ and select „add new device“.
- Follow steps and complete linking
- Works also with dedicated remote control
- Control lights by phone or remote control

Code

F007939


⦿ Riex EC49 Wifi Controller Tuya Multicolour

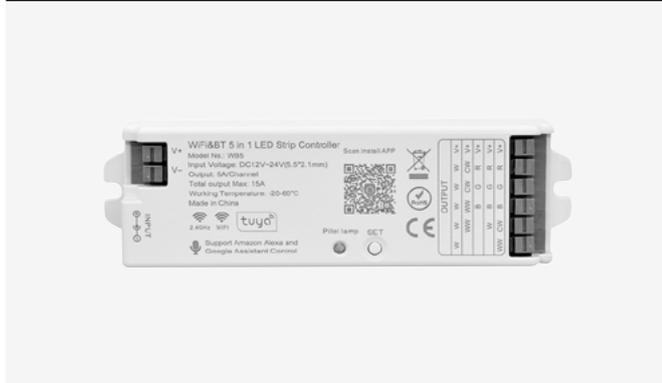

- Universal Wi-Fi controller for LED strips and lights
- Designed for Single colour, CCT, RGB, RGBW, RGBWW LED lights
- Compatible with Tuya solution, Bluetooth can also be used
- Voltage 12 / 24 V DC
- 6 outputs per 6 A, total 15 A
- Max. power 180 W [12 V], 240 W [24 V]
- Supports Wi-Fi 2.4 GHz 802.11 b / g / n
- Stand by consumption <0.5 W
- Input: terminal connector with push buttons
- Output: terminal connector with push buttons
- Compatible with Riex remote control

Instruction

- Install Tuya Smart application [QR or App store]
- Register or login to account [limited functionality is possible without account]
- Connect the power and output cables according to instruction diagram
- Connect controller to power supply, press „SET“ for long time or switch on / off 4 times
- Open app, phone will automatically find device, if not, click „+“ and select „add new device“.
- Follow steps and complete linking
- Works also with dedicated remote control
- Control lights by phone or remote control
- To change mode according connected LED light [single colour / CCT / RGB etc.] push „SET“ button - information diode change colour.

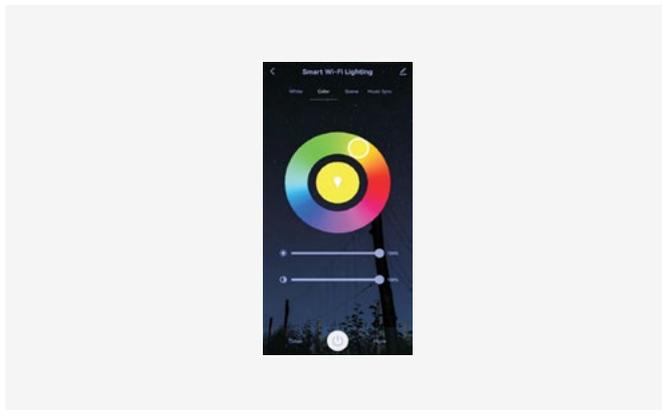

Code

F007940

Modes and LED colour:

White	Yellow	Red	Green	Blue
Single colour	CCT	RGB	RGBW	RGB+CCT

Status light indication:

Red	Green	Red blinking	Blue
Disconnected from network	Connected	Waiting for smartlink	Wifi router disconnected, but still controllable

⊕ Riex EC49 Remote Control 4 Zone Universal



- Universal remote control for controller Riex EC47 / EC49
- Control of Single colour, CCT, RGB, RGBW, RGBWW LED lights [with Riex EC47 only single colour]
- 4 independent zones allows control 4 groups of controllers
- Working range up to 30 m [unobstructed]

Instruction

- Pairing - push switch off power button for at least 10 sec. Power on, push 3 times zone button „1“ on zone you want to connect.
- Light will blink 3 times when connect successfully.
- Unpairing - switch off power for at least 10 sec.. Power on, push 5 times zone button „1“ on zone you want to disconnect.
- Light will blink 10 times when unpairing is successfull.

Code

F007941

⊕ Riex EC47 / EC49 Remote Control Dual Colour



- Universal remote control for controller Riex EC44 / EC49
- Control of Single colour or CCT LED lights [with Riex EC47 only single colour]
- 4 independent zones allows control 4 groups of controllers
- Working range up to 30 m [unobstructed]

Instruction

- Pairing - switch off power for at least 10 sec.. Power on, push 3 times zone button „1“ on zone you want to connect.
- Light will blink 3 times when connect successfully.
- Unpairing - switch off power for at least 10 sec.. Power on, push 5 times zone button „1“ on zone you want to disconnect.
- Light will blink 10 times when unpairing is successfull.

Code

F007943

ASA Plastici Versacharger

- Solution for wireless charging a wide range of smartphones, watches, earphones etc.


● ASA Plastici Versacharger



● Black ring + black matt



● Polish chrome ring + black disk

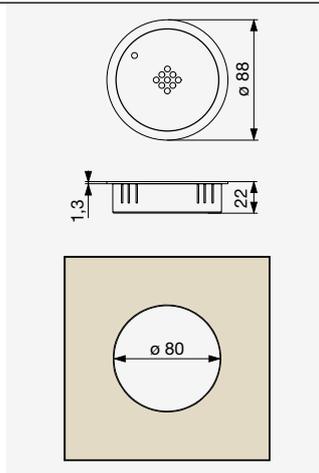

- Wireless fast charger Qi standard
- Max. charging power 15 W [must be supported by phone too]
- The start of charging is signaled by a beep. The LED indicates charging, turning off when fully charged.
- Installation hole 80 mm
- Set include charger, cable 2 m [USB A / micro USB] and adaptor with EU plug* [USB A]
- For indoor use

Colour	Code
Black ring + black matt	F010130
Polish chrome ring + black disk	F010131



Connecting fittings





KEEP-NUTS




- **KEEP-NUT®** is a special insert for making threaded seats on surfaces like marble, granite, stone, Corian®, HPL, composite material etc. It's easy to install without glue and is very reliable. Patented technology of crowns and with plastic ring that holds the complete set of parts.
- **Applications:** Ventilated facades, building cladding, interior design include the HPL slim boards, fastening of sanitary elements, kitchens, etc.

Examples of tensile test results for installation of individual materials

Code	F007558	F007559; F007560	F007561
Keep-Nut® model	IM2S	IM2S [H8,5]	IM2S [H15]
Panel Thickness [mm]	10 - 12	12 - 20	30
Average tensile strenght [kN]			
HPL	2.10	4.23	×
Corian®	2.06	3.64	×
Porcelain	2.50	3.50	×
Sintered stone [Lapitec® - Neolith®]	1.80	3.01	6.81
Natural Stone - Granite	2.6	3.8	7.75

Average sealing values by material, as tested by the NATURAL norm [excluding HPL and CORIAN®] STONE INSTITUTE according to the ASTM C1354.


● Keep-nuts IM2S

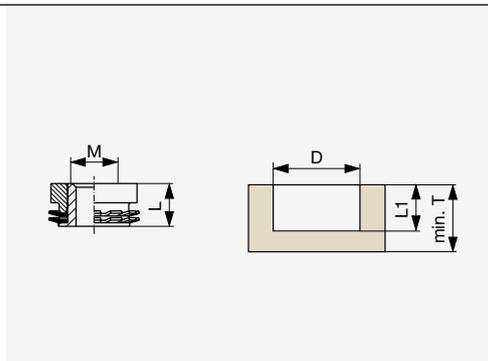

- With 2 lamels
- D = 12 mm

M	Code	min. T [mm]	L	L1
M4	F007558	9	6	6.5


● Keep-nuts IM4S

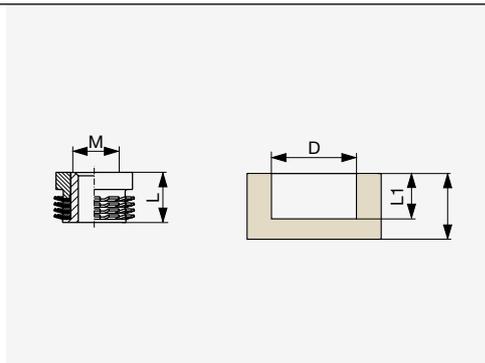

- With 4 lamels
- D = 12 mm

M	Code	min. T [mm]	L	L1
M4	F007559	11	8	8.5
M5	F007560	11	8	8.5
M6	F007561	18	15	15.5

● Keep-nuts IM4S Inox

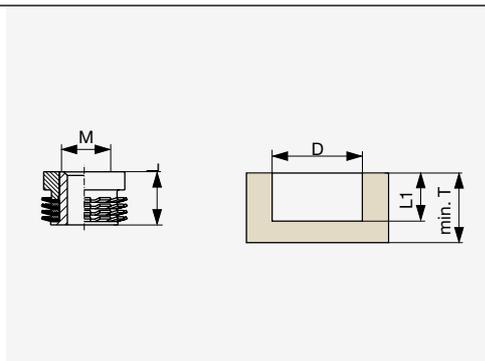

- With 4 lamels in Inox 316
- D = 12 mm

M	Code	min. T [mm]	L	L1
M6	F007562	12	8	8.5

● Keep-nuts Drill bit 12x10



① F007563



① F007564

Description	Size	Code
Diamond drill bit - 10 mm round shank	12x10	F007563
Test rod to verify correct diameter for installation of „Keep nuts“	×	F007564

Eccentric Connectors

⊕ Riex JC15 LIGHT CAM Housing



⊕ F007573

Thickness of material [mm]	Colour	Height L [mm]	Code	Diameter [mm]	Position of pin l [mm]
15 - 16	White zinc	12	F007573	15	7.8
18		12.7	F007574		8.5
19		13.5	F007575		9.3

⊕ Riex JC25 CAM Pin Dowel with Metal Central Part and with PZ Drive




⊕ F012764

⊕ F011433

⊕ F012765


ø M [mm]	Drilling distance l [mm]	Code	ø D [mm]	Length L [mm]
Eurocrew	24	F012764	7	11
	34	F011433		8.5
M6	34	F012765		

⊕ Riex JC03
Connecting Fitting - Housing

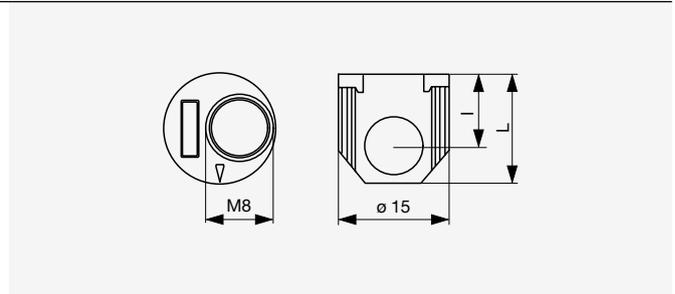


Thickness of material [mm]	Colour	Code	Height H [mm]	Drilling distance I [mm]	Diameter [mm]
16	White zinc	F007566	13	8	15
18		F007567	14.2	9	

⊕ Riex JC03
Connecting Fitting - Pin Dowel

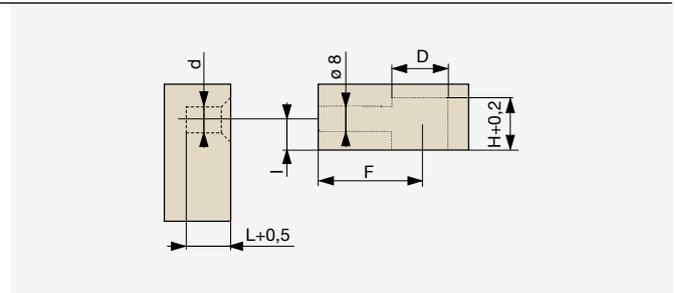

Connector	Code	Diameter [mm]	Length L [mm]
Eurocrew	F010918	7	34
M6	F010919		


⊕ Riex JC03
Connecting Fitting - Double Pin Dowel

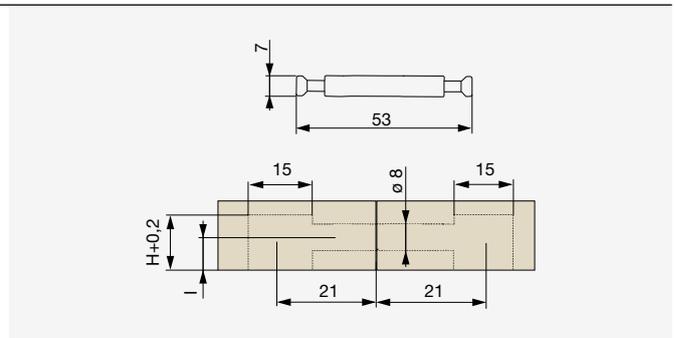

Code	Diameter [mm]	Length L [mm]
F007572	7	34


Special Connectors

➤ Riex JC09 Front Drawer Adjustment

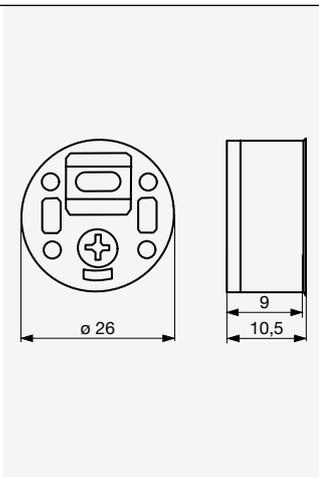


- Element for installation and adjustment for double fronts of wooden drawers
- 4 mm adjustment range in vertical and horizontal direction

① F007582

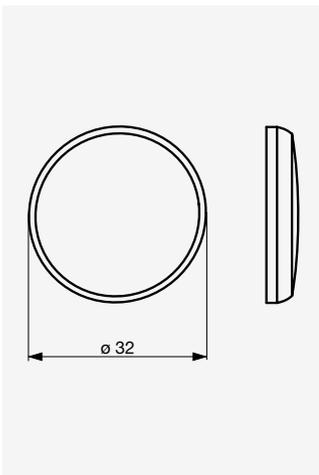

② F007583

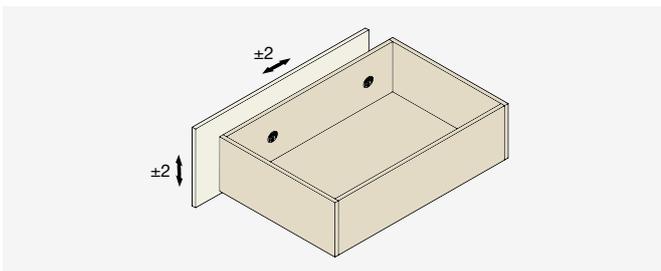

Type	Code	Colour
Mechanism	F007582	Black
Cover	F007583	



● Spax Screws
Flat Countersunk Head - PZ Drive



① Full thread



② Half thread

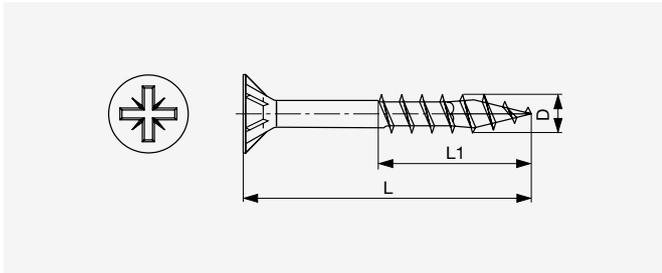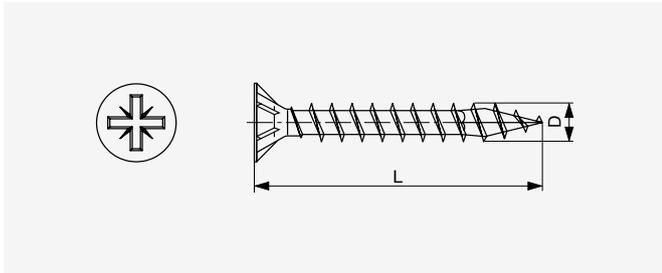

Full thread


Diameter D [mm]	Length L [mm]	Code	Colour
2.5	12	F009817	White zinc
	20	F007687	
3.0	15	F009818	
	16	F004240	
	20	F004241	
	25	F009819	
3.5	30	F009820	
	15	F009821	
	16	F004242	
	20	F004243	
	25	F004244	
	30	F004245	
4.0	35	F008065	
	40	F004246	
	45	F010133	
	50	F009822	
	16	F004247	
	20	F004248	
	25	F004249	
	30	F004250	
	35	F004252	
	40	F004253	
5.0	45	F004254	
	50	F004255	
	60	F009823	
	80	F009824	
	50	F004256	
	60	F004257	
	70	F004258	
	80	F004259	

Half thread

Diameter D [mm]	Length L [mm]	Code	Thread length L1 [mm]	Colour
3.5	35	F010355	23	White zinc
	40	F010356	23	
4.0	30	F004251	18	
	45	F010134	30	
	50	F010135	32	
	60	F010136	37	

▲ CONTENT

● Spax Screws
Flat Countersunk Head - TX Drive

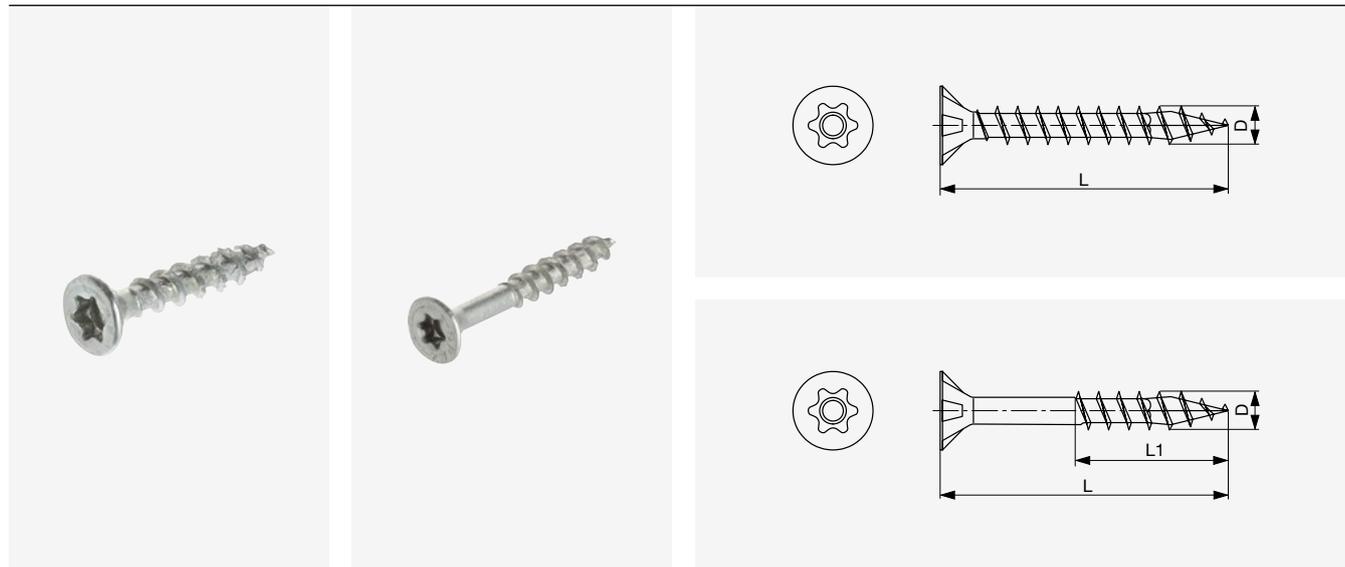

● White zinc Full thread

● White zinc Half thread


Full thread

Diameter D [mm]	Length L [mm]	Code	Colour
3.0	16	F004205	White zinc
	20	F004206	
3.5	15	F009812	
	16	F004207	
	20	F004208	
	25	F004209	
	30	F004210	
	35	F004211	
4.0	40	F010359	
	15	F010360	
	16	F004215	
	20	F004216	
	25	F004217	
4.0	30	F004218	
	35	F004220	
	40	F004221	
	45	F004222	
	50	F004223	
5.0	50	F004225	
	60	F004226	
	70	F004227	
6.0	80	F004228	
	60	F008631	

Half thread

Diameter D [mm]	Length L [mm]	Code	Thread length L1 [mm]	Colour
3.5	30	F010358	18	White zinc
	35	F009814	23	
	40	F008064	10	
	50	F004212	32	
4.0	30	F004219	18	
	35	F010361	23	
	40	F010362	23	
	50	F004224	32	
	60	F008266	37	
4.5	35	F010363	25	
	40	F010364	25	
	50	F010365	32	
	60	F010366	37	
	70	F010367	42	
	40	F010368	27	
5.0	45	F010369	30	
	50	F010132	32	
	55	F010370	37	
	80	F004229	46	
	90	F004230	61	
	100	F004231	61	
6.0	120	F004232	69	
	50	F004233	32	
	60	F004234	37	
	70	F004235	41	
	80	F004236	46	
	90	F004237	61	
	100	F004238	61	
	120	F004239	68	


● Spax Screws
Flat Countersunk Head - TX Drive in Black Zinc



Full thread

Diameter D [mm]	Length L [mm]	Code	Colour
3.5	16	F009813	Black zinc
	20	F008608	
4.0	25	F009815	
	35	F009816	

● Spax Screws
Pan Head

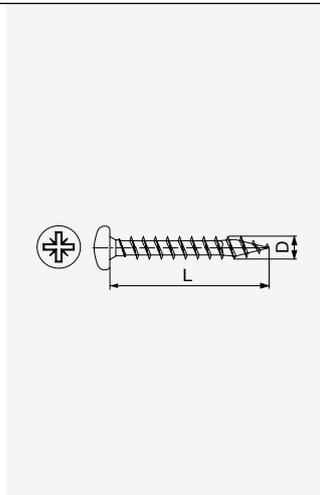

Diameter D [mm]	Length L [mm]	Drive	Code	Colour
3	10	PZ	F010371	White zinc
3.5	16	TX	F004262	
		PZ	F010372	
4.0	18	TX	F004265	
		PZ	F004268	
4.0	20	TX	F010373	
	4.5	16	TX	
5.0	20	TX	F010374	
	25	TX	F010375	
6.0	40	TX	F010376	
	50	TX	F010377	
	60	TX	F010378	



Adhesives & Cleaners





HRANICLEAN

Profess
for Home

Soft



therm
Hot Melt

Hranitherm mini-cartridges



	10.880 natural 10.881 white	10.390 LC natural* 10.391 LC white*
Technical information		
Packing	1 kg	1 kg
Base	PUR	PUR
Softening range [ring and ball]	×	×
Operating temperature	140 - 160 °C	140 - 160 °C
Operating speed	6 - 20 m/min	8 - 30 m/min
Viscosity at 140 °C	50 000 mPa·s	Approx. 72 500 mPa·s
Application field		
ABS, PVC and PP edging with a primer	•••	•••
Veneer edging	•••	•••
Melamine edging	•••	•••
Edging of solid wood	•••	•••
Softforming	•••	•••
CNC shaped edging	•••	•••
Manual shaped edging	•••	•••
HOLZ-HER cartridge devices	×	×

* Diisocyanate content below 0,1%
 ••• very suitable •• suitable • technically possible

Hranitherm Cartridges



	350 natural 351 white	390 LC natural* 391 LC white*
Technical information		
Packing	2.2 kg	2 kg
Base	PUR	PUR
Softening range [ring and ball]	x	x
Operating temperature	140 - 160 °C	140 - 160 °C
Operating speed	10 - 60 m/min	10 - 60 m/min
Viscosity at 140 °C	Approx. 60 000 mPa·s	Approx. 72 500 mPa·s
Application field		
ABS, PVC and PP edging with a primer	•••	•••
Veneer edging	•••	•••
Melamine edging	•••	•••
Edging of solid wood	•••	•••
Softforming	•••	•••
CNC shaped edging	•••	•••
Manual shaped edging	•••	•••
HOLZ-HER cartridge devices	x	x

* Diisocyanate content below 0,1%

••• very suitable •• suitable • technically possible

PO Hot Melt Adhesives



	600.58 natural	601.58 white
Technical information		
Packing	25 kg	25 kg
Base	PO slightly filled	PO slightly filled
Softening range [ring and ball]	155 °C	155 °C
Operating temperature	190 - 220 °C	190 - 220 °C
Operating speed	18 - 50 m/min	18 - 50 m/min
Viscosity at 200 °C	Approx. 60 000 - 80 000 mPa·s	Approx. 60 000 - 80 000 mPa·s

Application field

ABS, PVC and PP edging with a primer	●●●	●●●
Veneer edging	●●●	●●●
Melamine edging	●●●	●●●
Edging of solid wood	●●●	●●●
Softforming	●●●	●●●
CNC shaped edging	●●●	●●●
Manual shaped edging	×	×
HOLZ-HER cartridge devices	×	×
Festool cartridge devices	×	×

●●● very suitable ●● suitable ● technically possible

Hraniclean Soft Line



Packing

Cleaning agent for daily cleaning of furniture surfaces

500 ml spray; 5 l; 20 l

Hraniclean Soft Line is a household cleaner with a delicate citrus scent for everyday use. Suitable for cleaning furniture surfaces (laminated, high gloss and matt), glasses and mirrors. It also removes fingerprints from surfaces and finishes with a natural look of furniture thanks to the active foam.





Spraying Systems and chemical products
for perfectly cleaned workpieces directly
from your edgebanding machine



Release Agent LPZ/II [RI 001]



Using the Riepe Fine Nozzles, the Release Agent is applied to the top and bottom side of the workpiece inside the edgbanding machine. It is applied prior to the pre-milling with a very thin layer. This prevents adhesive from sticking to the workpiece so that no manual cleaning is needed anymore.



Lubricant NFLY [RI 004]



By spraying it to the pressure rollers in intervals it prevents adhesive from sticking to the pressure rollers. This makes cleaning them a lot easier. It can also be sprayed directly onto delicate edges which prevents markings, and it prevents protection foils from peeling off inside the machine.



Antistatic Coolant Agent LP289/99 [RI 403]



Especially when using PUR-Hotmelts the Riepe Antistatic Coolant Agent is required to quickly cool down the glue joint after the edge was applied to the board. The subsequent tools work directly in a solid material due to cooling-effect and no longer become clogged with adhesive.



Cleaning Agent LP163/93 [RI 006]



Right before the flat scrapers the Cleaning Agent is sprayed to the top and bottom side of the workpiece. The Agent dissolves the previously applied Release Agent and any adhesive residue. These will then be cleaned off by the following buffing wheels. The result: A clean workpiece in Finish-Quality!





Edges

Surround yourselves
with new Hranipex collections



Egger Decorative 24 +



Scan and explore the collection.

2.3 Interior collection FunderMax



Interior 2.3 Essential

Fundermax
For you to create

Scan and explore the collection.



Swiss Krono One World Collection 2024



Scan and explore the collection.

Falco Collection 2024




Falco
Collection

Scan and explore the collection.



Notes

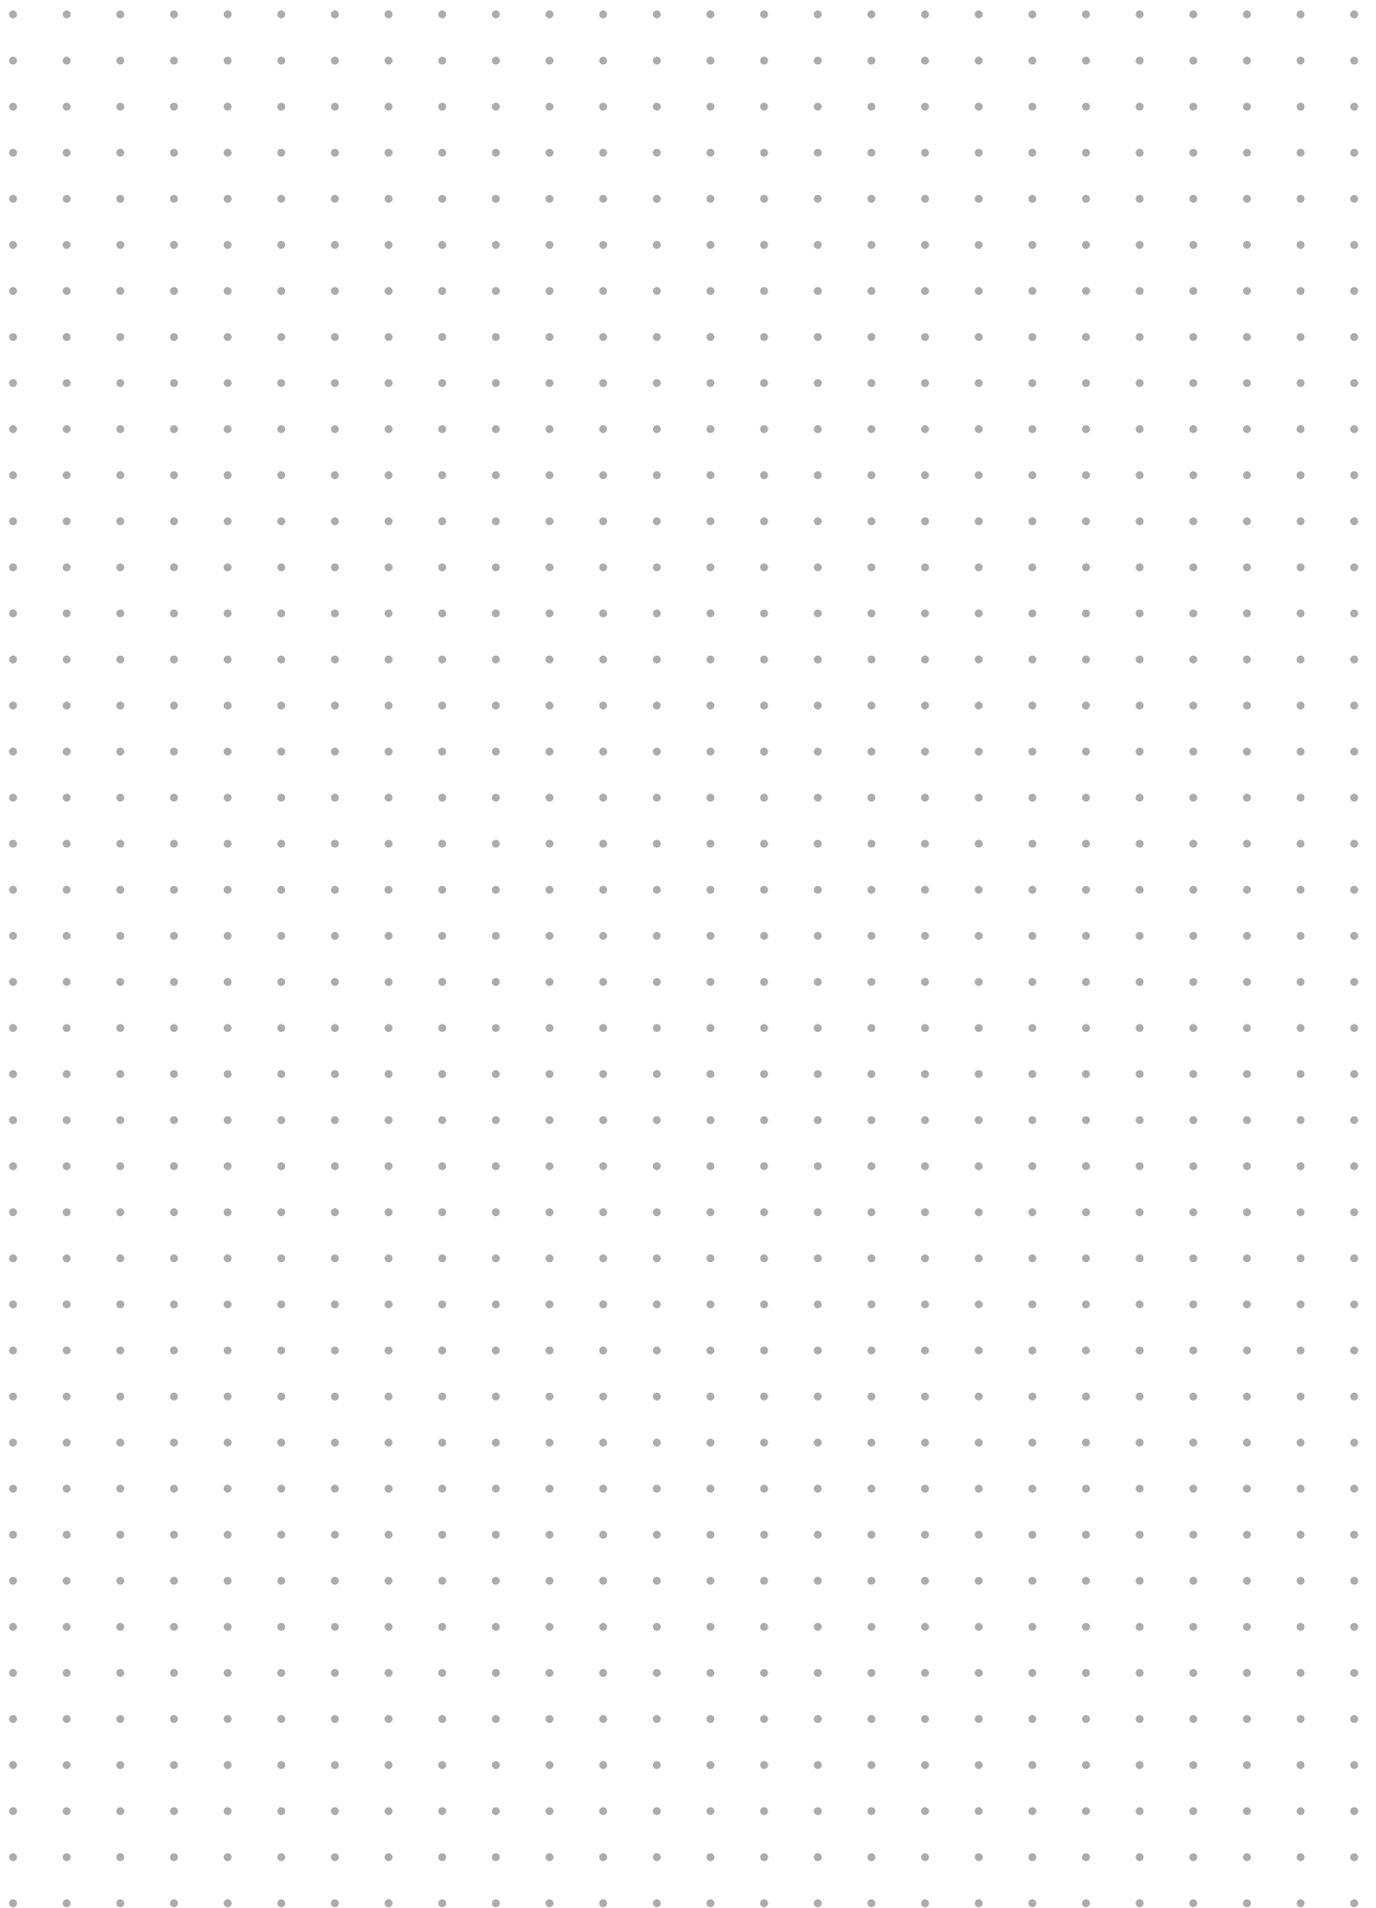

Contact

www.hranipex.co.uk
uk-hranipex@hranipex.com
0121 767 9180

HRANIPEX LIMITED
Unit 2 Radial Way
Birmingham Business Park
Solihull Parkway
Birmingham
B37 7WN